

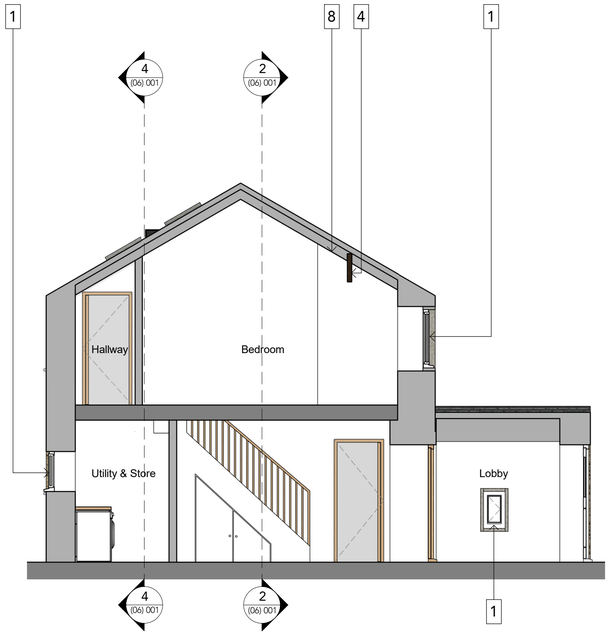



1 Proposed Section A-A
1 : 50

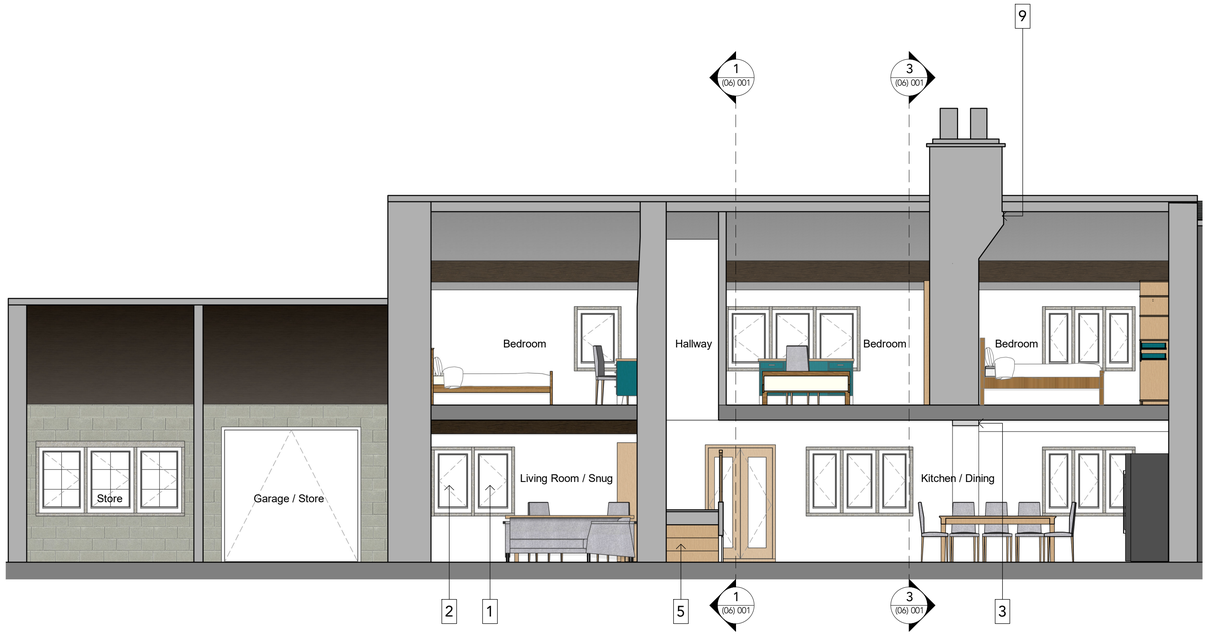


2 Proposed Section B-B
1 : 50

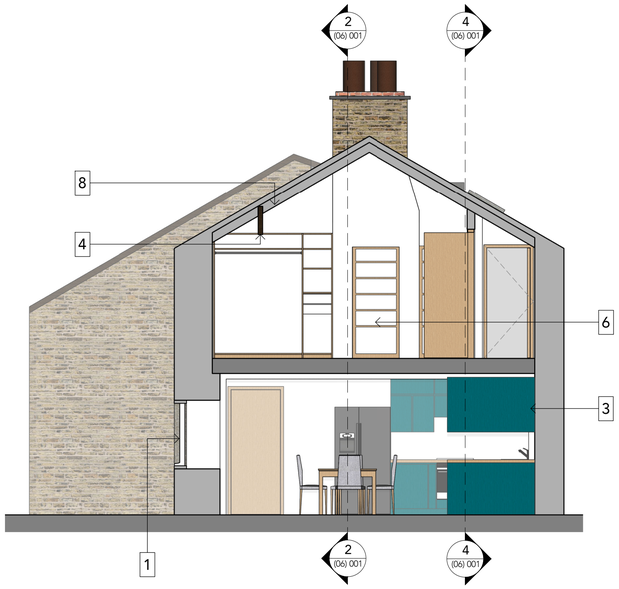

3 Proposed Section C-C
1 : 50

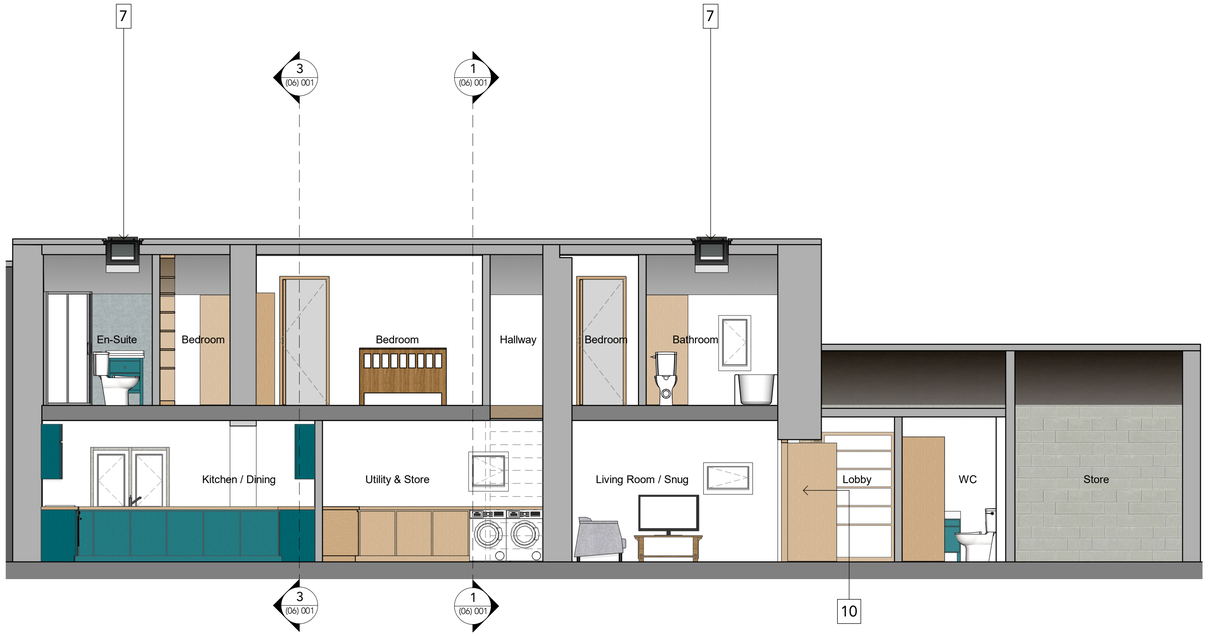

4 Proposed Section D-D
1 : 50

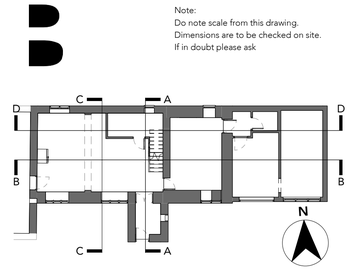

Note:
Do note scale from this drawing.
Dimensions are to be checked on site.
If in doubt please ask

1 New double glazed timber frame windows
2 Reinstated window
3 Retained expression of existing wall
4 Retained/reinstated exposed beams
5 New timber staircase
6 Existing fireplace location reused for storage
7 Conservation Rooflights
8 Warm roof buildup built to roof pitch
9 Remaining chimney stack supported on brackets from existing wall and expressed interally at ceiling level
10 Introduced doorway in existing wall
11 Repointed facades to orginal cottage
12 Redecorated existing garage door
13 Lead roof vents

Rev	Date	Intls	Details
A	17/04/19		Issued for LBC
-	12/03/19		Issued for review

© The moral rights of the author are hereby asserted.
This drawing and design is the sole property of Buttress Ltd and must not be reproduced without permission.
Buttress Ltd is Registered in England and Wales: 5363573

Buttress
41 Bengal Street
Manchester
M4 6AF

T 0161 236 3303
E contact@buttress.net
W www.buttress.net

Project Title	Manager's Cottage - Moorland Home
Client	Rochdale Children's Moorland Home
Location	Rochdale, OL12 9PN
Drawing ref	Proposed Sections

Date	17/04/19	Scale	As indicated
Checker	SA	Orig Paper Size	A1
		Status	Planning

Drawing ref	Job No	Drawing No	Revision
	8733	(06) 001	A