

Construction (Design & Management) Regulations 2015

HEALTH AND SAFETY PLAN

FOR

B&E BOYS LTD

PROJECT:

*St Johns Thornham CE Primary School
Phase 2*

Prepared By:	Carl Wilde	Date:	7 March 2025
Approved By:		Date:	

Issue List

	<u>Company</u>	<u>Position</u>	<u>Date</u>
1.	B&E Boys Ltd	Contracts Manager	8 January 2025
2.			
3.			

HEALTH AND SAFETY PLAN

CONTENTS

1.0 GENERAL STATEMENT

- 1.1 Policy
- 1.2 Scope and objectives
- 1.3 Standards

2.0 DESCRIPTION OF THE PROJECT

- 2.1 Description of the Project
- 2.2 Key personnel
- 2.3 Existing records and plans relevant to health and safety on site

3.0 MANAGEMENT OF THE WORK

- 3.1 Management structure
- 3.2 Health and safety induction
- 3.3 Liaison between parties on site
- 3.4 Selection and control of contractors
- 3.5 Risk assessments and method statements
- 3.6 Site access and security
- 3.7 First aid
- 3.8 Accident reporting
- 3.9 Site welfare arrangements
- 3.10 Temperature and weather Conditions
- 3.11 Lighting
- 3.12 Fire and emergencies
- 3.13 Site rules
- 3.14 Tool box talks
- 3.15 Competency and training
- 3.16 Safety inspections

4.0 ARRANGEMENTS FOR CONTROLLING SIGNIFICANT SITE RISKS (Safety Risk, Health Risk)

- 4.1 Delivery and removal of materials including waste/traffic routes, segregation of vehicles and pedestrians
- 4.2 Existing services and temporary electrical services
- 4.3 Temporary Works
- 4.4 Storage of materials
- 4.5 Adjacent premises – proximity and stability
- 4.6 Maintenance of equipment used on site
- 4.7 Control of substances hazardous to health
- 4.8 Housekeeping
- 4.9 Existing structures
- 4.10 Control of lifting operations
- 4.11 Preventing falls
- 4.12 Reducing noise and vibration
- 4.13 Hot Works
- 4.14 Controlling Dust
- 4.15 Deep Excavations and Drainage Works

5.0 THE HEALTH & SAFETY FILE

6.0 APPENDIX

- Asbestos survey
- Training Matrix
- Other Contacts
- Pre-Selection Procedures for Subcontractors
- Site Rules
- F10
- Site Traffic Management Plan
- Hospital Location Directions
- Blank Accident Investigation Report



QUALITY IS A FAMILY TRADITION

B&E BOYS LTD

1.0 GENERAL STATEMENT

1.1 Policy

It is the intention that this project shall be executed with the highest practicable regard to health and safety matters. This plan has been developed by B&E Boys Ltd in order to identify and detail the arrangements and measures which will be undertaken to achieve this.

It is Company policy to do all that is reasonably practicable to ensure that a safe and healthy environment is provided for all those who work for the Company or are affected by our work.

1.2 Scope and Objectives

The plan shall apply to all personnel involved on this project including all company employees, contractors and self-employed operatives.

The plan sets out the means by which health and safety will be controlled and monitored during the construction works.

The plan shall receive full co-operation from the management team and has total commitment from the Directors of B&E Boys Ltd.

Employees, and all contractors involved in the work will be consulted at all times with a view to any health and safety changes that will affect them.

The plan shall be reviewed as and when necessary, and shall be updated with such information as deemed necessary for the project i.e. method statements, specific site rules etc.

1.3 Standards

Implementation of the project will comply with the requirements of current health and safety and environmental legislation, BSI Guidance, Industry Standards, and Manufacturers/Suppliers Recommendations.

Reg. Office: Todd Carr Road, Waterfoot, Rossendale, Lancs, BB4 9SJ

Tel: 01706 211368

E-mail: info@beboys.co.uk

Web: www.beboys.co.uk

2.0 DESCRIPTION OF THE PROJECT

2.1 Description of the Project

The Works are the construction of a new 2-storey 1FE classroom extension comprising demolitions and alterations, new substructure, superstructure, internal finishes, lift, mechanical and electrical installations and associated external works and drainage.

Anticipated Timescales: 64 weeks

2.2 Key Personnel

Client: Cranmer Education Trust
Blue Coat School
Edgerton Street
Oldham
OL1 3SQ
Contact: Lorna Wright
Tel: 0161 6241484
Email: lwright@cranmeredt.org

Architect & Contract Administrator: Halliday Meechan
Architects Ltd
111 Piccadilly
Manchester
M11 2HY
Contact: Paul Howitt
Tel: 0161 661 5566
Email: hma@hallidaymeechan.com

Civil & Structural Engineers: Booth King Partnership
Tollgate House
9C Bridge Street
Ramsbottom
BL0 9AB
Contact: Ian Entwisle
Tel: 01706 822 022
Email: ian.e@booth-king.co.uk

Principal Contractor: B&E Boys Ltd
Todd Carr Road
Waterfoot
Rossendale
Lancashire
BB4 9SJ
Contact: John Boys
Tel: 01706 211 368
Email: info@beboys.co.uk

Quantity Surveyor:

Gateley Vinden
Ship Canal House
98 King Street
Manchester
M2 4WU
Tom Bradley
0161 839 9911
tom.bradley@gateleyvinden.com

Contact:

Tel:

Email:

Principal Designer:

Halliday Meechan
111 Piccadilly
Manchester
M1 2HY
Paul Howitt
0161 661 5566
hma@hallidaymeechan.com

Contact:

Tel:

Email:

M&E Engineer:

Preston Lee Chambers
Ashley Court Cannon Stret
Hollingworth
Hyde
Cheshire
SK14 8LR
Jim Lee
01457 766 177
jim.lee@plc-consult.co.uk

Contact:

Tel:

Email:

2.3 Existing Records and Plans Relevant to Health & Safety On Site

The following documents have been made available to the Principal Contractor and will also be made available to other contractors involved in the works:

- D2024 RBC Asbestos Management Plan Survey, April 2024
- HMA Design Hazard Management Register, 4 June 2024
- Pre- Construction Information Pack (5635 13.03 001 2A St Johns CE PS PCIP Rev C)

3.0 MANAGEMENT OF THE WORK

A Site Manager/Assistant Site Manager will be permanently on site throughout the construction works.

3.1 Management Structure

Operations Manager	Carl Wilde	Tel: 07803 022 769
Site Manager	Craig Bull	Tel: 07738 252 212

DIRECTORS AND CONTRACTS MANAGERS RESPONSIBILITIES

The Directors and Operations Manager have overall responsibility for the health and safety of employees, customers and members of the public, where they may be affected by the Company's activities. To meet these responsibilities they will, so far as is reasonably practicable:

Ensure that there exists an effective plan for health and safety management, supplemented by additional documents relating to particular areas, types of activity or groups of employees, and ensure that this plan is implemented.

Ensure that the Health and Safety Plan is reviewed on a regular basis.

Place on the agenda of any progress meeting an item entitled 'health and safety' where relevant health and safety matters will be discussed together with recommendations where necessary. Health and safety will be given equal consideration with other project delivery issues.

Ensure that adequate resources and information are made available to enable the plan to be effectively put into practice.

Ensure that the duties and responsibilities for health and safety are properly assigned, accepted and understood by all personnel under their control.

Ensure that the sites health, safety and welfare arrangements are effectively implemented in accordance with the plan.

Ensure that all supervisory staff under their control carry out their duties regarding health and safety.

Co-operate with the Health and Safety Executive, the fire service and any other outside agency concerned with health and safety enforcement.

SITE MANAGERS RESPONSIBILITIES

Supervisory staff are in a special position to influence attitudes and give encouragement to active participation in health and safety matters by employees under their control. Therefore, the Site Manager will, so far as is reasonably practicable:

Ensure that all persons under his control have been briefed on and understood the health and safety information relevant to the project, are shown where such information is held, and receive sufficient training on fire precautions, first aid arrangements and any other emergency procedures relevant to the project.

Ensure that necessary protective clothing and equipment is correctly used and maintained in good order by employees under their control, visitors to site and external contractors.

Co-operate and assist where required in any site audit, risk assessment, method statement, accident investigation or associated procedures carried out on the project.

Take responsibility where reasonably practicable for undertaking site specific risk assessments and method statements, ensuring that any further actions identified within the risk assessment process are actioned.

Take an active role in ensuring that the requirements of any risk assessments and method statement are complied with by all persons under their control.

Carry out regular inspections of workplaces, means of access, plant tools and equipment, the working environment, fire precautions and welfare arrangements.

Monitor safe working conditions and practices on site, ensure the security of the site and that no unauthorised persons are permitted on site.

Consult and co-operate with the Directors and Contracts Manager when matters arise requiring specialist knowledge and agree appropriate action.

Communicate any health and safety matters to their team and the Directors/Contracts Manager and vice versa.

Provide regular toolbox talks and other topical safety briefings to all site-based employees maintaining records of attendance to such briefings.

Comply with procedures laid down for reporting and investigating accidents taking prompt action to prevent re-occurrence whenever possible.

3.2 Health & Safety Induction

The Site Manager will carry out a site-specific induction for each operative involved in the works, prior to them starting work. All persons will be required to sign the appropriate form to say that they agree to abide by the site rules; have been briefed on their risk assessment and method statement and have provided evidence of training and competency where specifically required.

3.3 Liaison Between Parties On Site

A dedicated Health & Safety File will be held on site, which will hold all safety information for the project, and which will remain available for reference, by all contractors.

Where a contractor is required to carry out a design element to the works, then such a design will be forwarded to the Principal Designer for final approval. The Principal Contractor will be responsible for co-ordinating any design submissions in a timely manner.

As Principal Contractor our site management team are to plan for safety on site at formal monthly production meetings. In addition to this and at intervals to be determined by the Contracts Manager, subcontractors will be called to co-ordination meetings. Advance notice of meetings will be given to the Client and Principal Designer who will be invited to attend should they so wish. Minutes of the meetings will be distributed to all attendees and relevant issues communicated to the workforce where appropriate.

3.4 Selection and Control of Contractors

All contractors involved in the work have been selected after completing a pre-qualification health and safety questionnaire and being placed on B&E Boys Ltd Approved Contractor list. No contractor will be permitted on to site unless the appropriate health and safety information in relation to their work has been approved by the Contracts Manager or Site Manager.

3.5 Risk Assessments and Method Statements

All persons engaged on work within this project will be made aware of the significant risks prior to them commencing work on site. Subcontractors will be required to provide site specific risk assessments and/or method statements in advance of their work commencing on site.

A weekly review of each stage of the work will be carried out by the Site Manager in order to identify the forthcoming activities. Following this review, site specific risk assessments/method statements will be prepared or requested from the relevant contractor.

If at any time risk assessments are thought to be no longer valid (e.g. a change in working practices or amendment to the design) the risk assessment must be reviewed and updated.

Risk assessments and method statements will be issued to B&E Boys Ltd prior to each stage of the work commencing for final approval.

3.6 Site Access and Security

The main entrance to the site is via Thornham Lane

All B&E Boys Ltd employees and contractors will be required to sign in and out, at the site office each day. A contractor induction will be provided to all persons involved on the project, and each contractor/operative will be required to attend such inductions.

The first person on site and last person off site are required to sign in/out of the school. Even though sites are mainly separate, this will be needed for fire evacuation registers.

Signs advising of the nature of the work will be placed around the building perimeter warning of the construction work in progress, in positions agreed with The Main School

The site is ringed by a hoarding/fence line. Within that perimeter fence will be a gated pedestrian entrance will be positioned as shown on the site traffic management plan, with pedestrian barriers positioned across the footpath when the entrance is in use, preventing pedestrians from walking into vehicles.

A banksman will be present at all times when vehicles are entering and leaving site. No vehicle access will be allowed during the school times which will be determined by the school and shared with all personnel and suppliers. This will form part of the subcontractors and suppliers order outlining access arrangements and times vehicles can enter site.

Due to the proximity of the school and at peak pedestrian crossing, no vehicle movements will be allowed at peak pedestrian times:

8.30am-9.15am

3.00pm-3.45pm

Maintenance of the sites existing emergency procedures

It is essential that the works do not adversely affect the existing fire escape procedures and access for emergency service vehicles. Prior to erection of fencing and commencement of demolition works it is essential that any routes previously accessible in the work area have been sealed off/made inaccessible and alternative procedures put in place and incorporated into their fire risk assessments/policy for the duration of the work.

Due to the proximity of the site to The St John Thornham school the fire procedures will need to be incorporated into the site fire action plan, so that when the schools fire alarm is triggered work on site ceases, site personnel make their way to the site muster point, where the site fire co-ordinator will ensure all operatives are accounted for and report to the site manager/estates manager.

In case of emergency on site the site manager must inform The School and agree how the alarm will be raised by site to ensure that the school is notified.

3.7 First Aid

The Principal Contractor will provide a trained first aider on site throughout the duration of the project. Names of first aiders will be displayed within the Site Managers office.

The Principal Contractor will also provide a first aid box, which will be readily available and will be responsible for ensuring that it remains fully stocked throughout the duration of the project.

The location of the closest defibrillator is:

St John's Thornham CE Primary School

Located in the kitchen, off main reception

This is accessible during school open hours.

An alternative defibrillator is accessible via

Richard Bentley Smalley Memorial Hall

Smalley Memorial Hall, Thornham Lane,

Rochdale, M24 2RE

Approx 7 mins walking/2 mins by car

Available: 24/7

3.8 Accident Reporting

An Accident Report Book will be held on site, within the designated site office. All employees and contractors are required to report all accidents and incidents occurring on site immediately to the Site Manager. Any entries will be dealt with in line with the requirements of RIDDOR and in any event, notified to the Contracts Manager. In addition, all incidents which result in first aid treatment being required will be investigated in an attempt to prevent a recurrence.

Should a non-employee (e.g. visitor or member of the public), suffer injury as a result of work activities, details must also be recorded in the Accident Report Book and the correct details must be taken of the name and address of the injured person. In the first instance, the Contracts Manager will be notified, of any accidents, near misses or dangerous occurrences.

Location of nearest hospital:

Royal Oldham Hospital

Rochdale Road, Oldham, Lancashire, OL1 2JH

Phone: 0161 624 0420

Distance: Drive 3.8 miles, 10 min

3.9 Site Welfare Facilities

Welfare including hot and cold running water, drying facilities and places to take breaks along with toilet facilities, will be made available initially via a self-contained unit and then a full site set up including office, mess room, and toilet block within the site compound. All persons involved on the project are required to maintain the facilities to the required standard. A programme of housekeeping to the facilities will be maintained throughout the works.

All staff should ensure the following guidelines are followed when using site welfare facilities, including:

- Wash hands regularly for a minimum of 20 seconds
- Utilise hand sanitiser and tissues
- Clean as you use – welfare, meeting rooms, printer areas etc
- Only operate mobile plant if you are authorised to do so

3.10 Temperature and Weather Conditions

The Principal Contractor will ensure that a suitable level of fresh air is available throughout the duration of the works including the use of particle filters on diesel exhaust plant operated within any internal building where practical and via the use of temporary extraction equipment. In the event of adverse weather during high level external works, then work will cease until the Site Manager confirms that it is safe to resume such work.

3.11 Lighting

Where necessary, a supply of temporary lighting will be provided by the Principal Contractor and be of sufficient quantity to adequately illuminate the work areas.

Areas will be constantly monitored to ensure that the lighting levels remain adequate, taking in to account the work being carried out.

3.12 Fire and Emergencies

Fire evacuation protocols to be agreed with the school.

The school who **must** be informed immediately if there is a fire within the construction site.

School contacts are:	Rebecca Hunter	Headteacher	07816 655 647
	Gail Robertson	Caretaker	07803 850 553

In the event the school has a fire or lockdown, the Site Manager will receive notification via the school fire alarm, or from either Rebecca Hunter or Gail Robertson and must evacuate or lockdown as instructed. In the event of a lockdown, all works must cease, and contractors must stay out of site within their site boundary until the Site Manager is notified of the all-clear.

There will be a whole site fire evacuation drill at the start of the main works, organised by the school.

A specific fire plan for each stage of the works will be prepared for the project by the Site Manager – and will be communicated to all contractors during the induction. All persons arriving on site will be provided with a site-specific fire and emergency induction which will include:

- Means of raising the alarm in the event of an emergency
- Confirmation of the location of services isolation points
- Firefighting equipment and location
- Maintaining good housekeeping standards and disposal of waste on site
- Permitted external smoking areas
- Assembly point on site
- Exit routes and in particular the requirement to NOT use the lift under any circumstances.
- The requirement to close all designated fire doors on close of work each day.

FIRE PROCEDURES

- 1) Upon discovering a fire, the alarm should be raised by using either existing facilities or the air horn where such facilities are not available (NOTE: a fire point will be placed on each floor, at the staircase/landing point).
- 2) The Site Managers/Supervisor will contact the emergency services by dialling 999 and also co-ordinate any emergency evacuation in conjunction with the contractors working on the project.
- 3) When connected to the Fire Service, state slowly and distinctly:

The full address of the site:

St Johns Primary School
Thornham Lane, Middleton, ML24 2SB

Site Location – What3Words:

///doll.wins.paints

- 4) Do not replace the receiver until this information has been correctly acknowledged.
- 5) Do not re-enter the site until instructed to do so by the Fire Authority or Site Manager/Supervisor

3.13 Site Rules

B&E Boys Ltd will provide a project specific list of site rules and discuss the contents during each worker's safety induction. All employees and contractors engaged on the work will be required to sign acknowledgement and agreement to such rules (see appendix Item 6).

3.14 Toolbox Talks

A regular schedule of tool box talks will be delivered throughout the project and relative to the stage of works. All contractors are required to attend such talks and to ensure that all persons working on their behalf also attend.

3.15 Competency and Training

All those involved in the work will be required to demonstrate that they have the required competence and skill levels appropriate to the tasks to be undertaken. The Principal Contractor and his Site Manager will approve all health and safety documentation and training records prior to contractors being permitted to commence work. Where training records are not provided on commencement of work in relation to plant or powered access equipment, then the contractor concerned will not be permitted to operate the equipment until proof of competence is provided.

3.16 Safety Inspections

During the project a regular programme of inspection to all work areas will be carried out by the Site Manager, covering all areas and all contractor activities. Any temporary works installed by a Contractor will require a written inspection report in addition to the daily inspection. Records of inspections will be forwarded to the Principal Contractor.

A weekly written inspection will be completed by the Site Manager and, where further actions are identified, the Contracts Manager will be responsible for closing out the report.

In addition to this, an external health and safety audit will be carried out on the project by the Principal Contractors External Health and Safety Advisors. Where the Client asks, then a copy of the written report will be forwarded to them, following completion of each audit.

Where a subcontractor's own safety officer visits site they must provide a resume of their findings upon leaving.

4.0 ARRANGEMENTS FOR CONTROLLING SIGNIFICANT SITE RISKS

4.1 Delivery and removal of materials including waste/traffic routes, segregation of vehicles and pedestrians

Vehicle Access

The access is via Thornham Lane into the site compound via designated vehicle routes.

Contractor Parking

Parking down Thornham lane

No parking near or adjacent to the school

Where work affects parking a site-specific method statement will be prepared, including identifying how access will be maintained.

All delivery drivers are to be notified in advance, of the requirement to ensure delivery of materials will only be permitted from the main front entrance avoiding peak school hours.

Contractors will also be notified in advance regarding width restrictions in relation to delivery of materials and that in some circumstances, there may be a necessity for deliveries to be split and delivered via smaller vehicles.

All materials and equipment required for completion of the works will be safely stored within the site boundary either in a storage container or for larger materials in the designated storage area.

4.2 Existing Services and Temporary Electrical Services

110v single phase, via a temporary 240v site mains supply and using a transformer to provide 110v. Where mains operated equipment is used on site then an RCD (residual current device) will be fitted at the supply source.

4.3 Temporary Works

The Site Manager will co-ordinate any temporary works and ensure that a temporary works design is carried out and that a temporary works register is maintained throughout the work involving such activity. Where necessary, a permit to work procedure will be followed, in particular for any work involving roof work, excavations and hot work.

4.4 Storage of Materials

Due to the nature of the work being undertaken it will be necessary to store larger materials such as bricks and blocks externally in a designated storage area, smaller items will be stored within a storage container. A skip will be provided positioned so as not to be an obstruction or fire hazard within the site compound area.

4.5 Adjacent Premises, Proximity and Stability

Not applicable.

4.6 Maintenance of Equipment Used on Site

All plant and equipment used by contractors will be safe, efficient in use, guarded and equipped with safety devices where necessary, and examined, tested and certified in accordance with relevant legislation. Any plant used indoors will be either electrically powered or fitted with particle filters to the exhaust, in the case of diesel-powered equipment.

Plant and equipment shall be subject to regular maintenance or service in accordance with the manufacturer's recommendations and statutory requirements, registers, notices or certificates will be readily available for inspection or displayed.

Copies of current test, examination and operators certificates will be kept in the safety file.

All electrical equipment must be checked and display a current test certificate/tag and must be run off 110 volt or battery operated. RCD protection will also be provided.

4.7 Control of Substances Hazardous to Health

Substances hazardous to health will be identified by each contractor prior to work commencing. Safety data sheets, and where appropriate, COSHH assessments must be forwarded to the Principal Contractor.

All operatives exposed to such substances are to be adequately trained and conversant with the material. Information must also be provided to any other person likely to be affected by the substance.

4.8 Housekeeping

All contractors shall be responsible for keeping their work areas clear of rubbish and debris and for removing any such waste on a regular basis. Under no circumstances will materials or waste be left outside of the site boundary.

Waste will be disposed of on a daily basis either by removing in company transport to our head office yard skips OR by using an onsite skip within the site compound area. Details of site waste storage locations (skips) will be in the traffic management plan. Hazardous wastes will be disposed of in accordance with the relevant code of practice. The company hold waste plasterboard, wood and scrap metal skips at head office. The company also compacts and bails waste card and paper at head office for recycling. Designated skips are provided at our head office in order to separate waste and reduce environmental impact. All subcontractors will be required to adhere to B&E Boys Environmental Policies.

4.9 Existing Structures

Temporary support systems will be used where required during the removal of any load bearing structural members and will be monitored throughout their use via a temporary works co-ordinator. Any demolition works or soft strip will be carried out under a site-specific safe method of work (method statement). (Refer also to Section 4.3).

4.10 Control of Lifting Operations

All lifting operations will be subject to a written safe system of work. Where a contract lift is required, then the Contracts Manager will ensure that a detailed lift plan and specific method statement is submitted for final approval prior to work commencing.

4.11 Preventing Falls

All work carried out at height will be subject to a detailed safe system of work, prepared by the Contractor carrying out the work.

4.12 Reducing Noise and Vibration

All work including significant level of noise and vibration will be risk assessed prior to commencement of works, and suitable control measures specified within the specific risk assessment for the work.

All work equipment used has a HAV rating on a chart in the Site Manager's office. When work equipment is being used for a particular operation a risk assessment will have been prepared by the Site Manager with the safe exposure duration to that piece of work equipment noted and action taken to ensure that exposure limit is not exceeded in any one workday.

4.13 Hot Works

Where hot works are likely to be carried out, then a permit to work system will be used to control such works and will be issued by the Principal Contractor.

Wherever possible hot works will be avoided, and alternative means of working will be used (i.e. cramped pipe fittings in lieu of soldered pipe fittings).

Please see separate fire safety plan for further information and sample hot works permit.

Under no circumstances must any hot works be carried out without Director/Operations Manager/Contracts Manager sign-off.

4.14 Controlling Dust

Where soft strip and general demolition work is to be carried out, then the Contractor involved in the work will be required to assess each work area and identify his safe working procedure in controlling exposure to dust associated with the work.

The Principal Contractor will ensure that natural ventilation is also available where possible.

During the main construction activities, dust will be controlled by:

- Watering or misting construction sites, access roads, and stockpiles to reduce dust.
- Enclosure of dust-producing activities via barriers like fences or screens around high dust-producing operations, such as excavations or demolition.
- Use of wet drilling and cutting methods for activities like drilling or cutting to minimise dust generation.
- Enforcement of low-speed limits on construction vehicles to minimize dust generation within the site.
- Wheel washing will be carried out by handheld pressure washers at site exits to prevent dirt and debris from being carried offsite.
- All construction equipment will be well-maintained to reduce exhaust emissions and dust.
- Stockpiles will be covered to prevent wind-blown dust.
- Materials, such as sand, gravel, and other construction debris, in controlled, enclosed areas to prevent spillage and airborne dust.
- Optimize traffic routes, to minimize disturbance and dust along roads.
- Whenever possible, use paved or stabilized roads for heavy traffic to reduce dust generation.
- Implement air quality monitoring to track the concentration of dust and particulate matter, ensuring compliance with air quality standards.
- Use silt fences, where applicable around construction areas to prevent soil erosion and the migration of debris.

4.15 Deep Excavations and Drainage Works

There is a new drainage connection in the road for which there are no details at this time, the work will need to be undertaken by trained qualified operatives holding confined spaces and street works licences. The work will be risk assessed and carried out under a safe system of work.

Foundation excavation and pouring will be undertaken using a safe system of work set out in a method statement having first risk assessed. There is a requirement to tie into existing building foundation with a tie beam arrangement.

Service record drawings are to be checked for accuracy and identified on site prior to any works being undertaken. It is B&E Boys company policy to employ a specialist buried service company to attend site using modern techniques including ground penetrating radar to locate and physically mark up on site all buried services and plot accurately onto drawings using GPS. Any services identified in the area which is going to be excavated will be hand dug to establish exact details.

5.0 THE HEALTH & SAFETY FILE

The Principal Contractor, in conjunction with the Principal Designer, will ensure that the relevant number of the Health & Safety File are prepared, following completion of the project, and in line with the requirements set out in the pre-start Health & Safety Plan.

6.0 APPENDIX

6.1 ASBESTOS SURVEY REPORT

- R&D Asb Feb 2020 2003947D_ St John's CE Thornham Primary School – Asbestos Survey Report (Update)

6.2 COMPANY TRAINING MATRIX

Please see overleaf.

B&E Boys Ltd

Training Matrix 2025 - Site Staff

07 March 2025

Job Roles Key:	Site Manager	SM	Site Supervisor	SS	Joiner	Lab	Maintenance	Main
	Assistant Site Manager	ASM	Graduate Site	GradSM	Plasterer		Decorator	Dec
	Site Engineer	SE	Graduate Site	GradSE	Bricklayer		Apprentice (Speciality)	App
	Property Manager	PM	Assistant Proj	APM	Groundworker		Cleaner	Cle

*Enter the date the training took place - formulas will calculate the re-training requirement as per the following key:

Qualification expired
Training due within next 12 months
Qualification in date
One off training - no requirement for renewal
Not required/No qualification
Future Training

	Position	SM	SM	SM	ASM	PM	Q		Joi	Joi	Joi	Joi	Gro	Gro	Lab	Lab	Lab	Lab	Lab	PD	Main	Main	Main	Dec	Dec	Main	Dec	Bri	AppBri	App	App	
	Surname	Bull	Finnegan	Horsfield	Tomlinson	Crowley	Sagar	Boys	Birtwistle	Silcox	Quinton	Wolosianka	Greenwood	Kempson	Twardowski	Martin	Rawstron	Crook	Cascante	Craig	Ashworth	Leigh	Serin	Hynes	Keefe	Barnes	Crawford	Dutton	Dawson	Heywood	Green	
	First Name	Craig	John	Andrew	Mark	John	Neil	Brennan	Paul	Jack	Steve (William)	John	Lee	Virgil	Weislaw (Vishy)	Daniel	Harley	John	Miguel	Christian	Craig	Tony	Bill (William)	Stephen	Tony	Keven	Harvey	Samual	Billy	Miller	Finley	
Start/Induction Date	☉	03-07-00	22-07-91	06-05-14	06-07-15	29-01-07	03-05-99	-	18-04-16	09-11-15	08-06-98	09/04/1997 (1972)	28-07-97	04-05-21	21-06-04	03-08-20	26-02-22	26-05-15		23-02-13	29-06-15	04-02-08	11-08-97	29-01-07		05-03-07	04-12-23	09-05-22	05-07-21	08-08-23	26-06-23	
360 Excavator (tracked below 10T) (NPORS)	5 years	-	-	-	-	-	-	-	-	-	-	-	29-01-24	13-08-21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Abrasive Wheels	3 years	No	02-05-25	22-05-25	11-06-25	No	22-11-23	-	02-05-25	22-05-25	02-11-21	no	11-06-25	17-01-23	26-04-23	02-05-25	-	11-06-25	-	22-05-25	22-05-25	02-05-25	04-12-24	11-06-25	-	-	-	22-11-23	22-11-23	-	-	
Asbestos Awareness CAT A	1 year	-	-	-	12-04-22	04-12-24	-	-	02-05-24	02-05-24	01-05-23	-	02-05-24	02-05-24	02-05-24	02-05-24	-	10-10-24	-	17-07-24	-	24-09-24	24-09-24	17-07-24	-	-	-	02-05-24	02-05-24	-	-	
Asbestos Training Unlicenced CAT B	1 year	17-07-24	17-07-24	17-07-24	24-09-24	04-12-24	-	17-07-24	-	-	-	-	-	-	-	-	-	-	-	17-07-24	24-09-24	24-09-24	24-09-24	17-07-24	-	-	-	-	-	-	-	
Boys Spotlight on...Mental Health	☉	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	-	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	-	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	-	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	29-07-24	
Cable Avoidance Tool (inc Signal Generators) - Operator Training CAT & GENNY	3 years	25-11-24	05-04-24	05-04-24	05-04-24	-	-	25-11-24	-	-	-	-	05-04-24	05-04-24	-	-	-	25-11-24	-	-	-	05-04-24	-	-	-	-	-	-	-	-	-	
Calm Networks	1 year	-	09-11-23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
CDM Awareness	☉	18-03-22	07-04-22	08-04-22	20-04-22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
CISRS - Construction Industry Scaffolders Record Scheme (Basic Scaffold Inspection)	5 years	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Construction Environment: Hazards, Risks, Assessment & Controls	☉	13-05-24	13-05-24	13-05-24	13-05-24	13-05-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Contaminated Spoil and Tipping (PHB)	☉	-	06-07-18	06-07-18					-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Counter Balance Lift Truck (upto and including 5 tonne - includes Fork) (NPORS)	3 years	-	-	-	13-11-09	-	31-07-20	-	-	31-07-20	-	-	-	-	-	-	-	-	-	14-10-24	-	-	-	-	-	-	-	-	-	-	-	
CPC Driver Training	5 years	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	20-05-24	-	-	-	-	-	-	-	-	-	-	-	
CSCS (Expiry Date)	Variable	31-12-24	30-09-24	28-02-27	30-10-26	-	-	-	30-06-25	30-11-25	31-10-25	-	31-03-23	-	24-09-25	-	-	-	-	-	-	-	-	-	-	-	-	-	30-06-26	-	-	-
CSCS ID	☉	1308680	1308671	684559	741861	-	-	-	13300406	13419112	2212971	-	345614	-	2657836	-	-	1643280	-	5021137	3593402	-	1561354	3404429	-	-	-	13791905	-	-	-	
Dangerous Substances & Explosive Atmospheres(DSEAR)	2 years	11-09-23	07-09-23	13-09-23	13-09-23	04-10-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	01-12-24	13-10-23	-	-	-	-	-	-	-	-	
DBS Check	☉	28-05-22	13-06-23	26-05-23	20-08-19	-	-	-	02-06-22	20-07-22	26-05-23	-	26-05-23	-	-	05-07-22	-	-	-	21-06-22	-	16-02-21	-	11-10-19	-	-	-	-	-	-	-	
Driving License (Expiry Date)	10 years	05-03-26	27-07-24	04-09-27	27-02-31	31-10-30	-	-	11-03-24	19-02-26	17-05-28	05-09-25	05-06-25	03-05-37	15-12-24	N/A	12-01-34	22-06-27	-	23-02-26	14-06-24	01-06-25	21-01-24	23-09-23	-	-	-	-	-	-	-	
Eco Driving & Safe Loading	☉	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	03-04-19	-	-	-	-	-	-	-	-	-	-	-	
Face Fit/Qualitative Fitness Test - FFP3	2 year	17-07-24	24-09-24	17-07-24	24-09-24	15-05-23	-	-	02-05-24	02-05-24	18-05-23	20-04-22	02-05-24	02-05-24	18-05-23	02-05-24	15-05-23	15-05-23	-	17-07-24	24-09-24	24-09-24	24-09-24	17-07-24	04-11-24	15-05-23	?	02-05-24	02-05-24	03-09-23	03-09-23	
Fire Door Inspection Course	3 years	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Fire Safety Awareness in Construction and the Built Environment (12.1.24 sent course details)	5 years	13-01-24	11-03-24	08-04-24	12-06-24	19-06-24	-	-	08-07-24	14-06-24	14-06-24	28-06-24	04-04-24	21-06-24	14-06-24	14-06-24	08-07-24	01-07-24	-	20-06-24	17-06-24	24-06-24	13-06-24	13-06-24	-	-	25-06-24	21-06-24	14-06-24	14-06-24	13-06-24	
Fire Warden/Marshal Training: Highfield Level 2 Award in the Principles of Fire Safety (RQF) inc fire extinguisher	3 years	02-10-23	14-11-23	02-10-23	02-10-23	14-11-23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
First Aid At Work	3 years	23-03-23	13-08-24	23-03-22	09-12-22	-	-	-	09-09-24	07-07-23	-	21-05-24	07-07-23	-	-	19-11-24	-	-	-	-	-	07-07-23	-	07-07-23	-	-	-	19-11-24	-	-	-	
Forward Tipping Dumper (Wheeled) (NPORS)	3 years	-	-	-	-	-	31-07-20	-	-	31-07-23	-	-	21-03-24	21-03-24	-	-	-	30-11-18	-	21-03-24	21-03-24	-	-	-	-	-	-	-	-	-	-	
G&M Safe Deck & Assembly	☉	-	20-01-22	-	-	-	-	-	-	?	-	-	20-01-22	-	?	-	-	20-01-22	-	?	?	-	-	-	-	-	-	?	-	-	-	
Health and Safety Awareness/Essentials	3 years	-	07-07-21	-	16-05-20	-	-	-	21-12-22	28-07-22	11-08-22	21-12-22	28-07-22	21-12-22	28-07-22	27-04-22	21-12-22	21-08-19	-	16-06-22	21-12-22	16-06-22	28-07-22	28-07-22	-	-	-	28-07-22	-	04-07-24	-	
Health and Safety Awareness: Confined Spaces – An Overview	3 years	02-02-24	11-03-24	08-04-24	28-09-23	-	-	-	21-12-22	28-07-22	11-08-22	21-12-22	28-07-22	21-12-22	28-07-22	27-04-22	21-12-22	-	-	16-06-22	21-12-22	16-06-22	28-07-22	28-07-22	-	-	-	28-07-22	27-04-22	-	02-02-24	
Health and Safety Awareness: Confined Space Medium Risk	3 years	-	-	08-04-24	28-09-23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Health and Safety Awareness: Confined Space High Risk		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Health and Safety Awareness: Fire Safety Procedures on Client Sites	3 years	-	-	-	-	-	-	-	21-12-22	28-07-22	11-08-22	21-12-22	28-07-22	21-12-22	28-07-22	27-04-22	21-12-22	-	-	16-06-22	21-12-22	16-06-22	28-07-22	28-07-22	-	-	-	28-07-22	27-04-22	04-07-24	-	
Health and Safety Awareness: General Site Health & Safety	3 years	-	-	-	-	-	-	-	21-12-22	28-07-22	11-08-22	21-12-22	28-07-22	21-12-22	28-07-22	27-04-22	27-04-22	21-08-19	-	16-06-22	21-1											

B&E Boys Ltd

Training Matrix 2025 - Site Staff

07 March 2025

Job Roles Key:	Site Manager	SM	Site Supervisor	SS	Joiner	Lab	Maintenance	Main
	Assistant Site Manager	ASM	Graduate Site	GradSM	Plasterer		Decorator	Dec
	Site Engineer	SE	Graduate Site	GradSE	Bricklayer		Apprentice (Speciality)	App
	Property Manager	PM	Assistant Proj	APM	Groundworker		Cleaner	Cle

*Enter the date the training took place - formulas will calculate the re-training requirement as per the following key:

Qualification expired
Training due within next 12 months
Qualification in date
One off training - no requirement for renewal
Not required/No qualification
Future Training

	No Training																												Keighley											
	Position	SM	SM	SM	ASM	PM	Q		Joi	Joi	Joi	Joi	Gro	Gro	Lab	Lab	Lab	Lab	Lab	PD	Main	Main	Main	Dec	Dec	Main	Dec	Bri	AppBri	App	App									
	Surname	Bull	Finnegan	Horsfield	Tomlinson	Crowley	Sagar	Boys	Birtwistle	Silcox	Quinton	Wolosianka	Greenwood	Kempson	Twardowski	Martin	Rawstron	Crook	Cascante	Craig	Ashworth	Leigh	Serin	Hynes	Keefe	Barnes	Crawford	Dutton	Dawson	Heywood	Green									
	First Name	Craig	John	Andrew	Mark	John	Neil	Brennan	Paul	Jack	Steve (William)	John	Lee	Virgil	Weislaw (Vishy)	Daniel	Harley	John	Miguel	Christian	Craig	Tony	Bill (William)	Stephen	Tony	Keven	Harvey	Samual	Billy	Miller	Finley									
Higher National Diploma in Construction Site Supervision (CSCS)	☉	-	-	-	-	-	-	-	-	26-08-20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Legionella Awareness	5 years	03-10-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Legionella Awareness and Management Training: Responsible Persons and Operatives	☉	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Mental Health in Construction	1 year	-	-	-	29-05-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
MEWPS/IPAF/PAL (Mobile Boom)	5 years	-	-	-	21-02-23	-	-	-	03-05-23	03-05-23	21-02-23	-	-	-	13-05-21	-	-	-	-	07-04-22	-	08-04-22	08-04-22	13-05-21	-	-	-	-	-	-	-									
MEWPS/IPAF/PAL (Static Boom)	5 years	-	-	-	21-02-23	-	-	-	03-05-23	03-05-23	21-02-23	-	-	-	13-05-21	-	-	-	-	07-04-22	-	08-04-22	08-04-22	13-05-21	-	-	-	-	-	-	-									
MEWPS/IPAF/PAL (Scissor/Mobile Vertical)	5 years	-	-	-	21-02-23	-	-	-	03-05-23	03-05-23	21-02-23	-	-	-	13-05-21	-	-	-	-	07-04-22	-	08-04-22	08-04-22	13-05-21	-	-	-	-	-	-	-									
NRSWA Streetworks Supervisor Training		-	29-04-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
NRSWA Streetworks Operative Training	☉	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
NVQ Level 4 Diploma in Construction Site Supervision	☉	-	-	-	-	-	-	-	-	25-01-20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Paslode Nail Gun	2 years	-	-	-	15-11-24	-	-	-	15-11-24	15-11-24	25-11-21	-	-	-	-	-	18-11-24	-	-	-	-	15-11-24	-	-	-	-	-	-	-	15-11-24	-									
PASMA TOWER	5 years	25-03-22	13-09-21	20-09-21	21-03-22	06-09-21	-	-	17-05-21	13-09-21	29-06-20	-	11-06-24	11-06-24	-	11-06-24	-	-	-	-	-	12-06-20	29-06-20	29-06-20	-	-	-	-	06-05-22	-	-									
PASMA LOW LEVEL	2 year	-	-	-	-	-	-	-	-	22-10-24	-	-	-	-	-	-	-	-	-	-	-	-	22-10-24	22-10-24	-	-	-	-	-	-	-									
PAT Testing Training	3 years	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	06-04-23	-	-	-	-	-	-	-	-	-									
Plant Operations L2 NVQ	☉	01-03-11	01-03-11	-	-	-	-	-	-	-	-	-	16-02-11	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
PUWER & RIDDOR	5 years	-	-	-	-	-	-	-	-	-	-	-	06-11-24	16-12-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Ride on Roller (NPORS)	5 years	-	-	-	-	-	-	-	-	-	-	-	05-04-24	-	29-07-20	-	-	24-01-22	-	-	-	-	-	-	-	-	-	-	-	-	-									
Risk Assessment (Construction Site)	☉	11-10-11	13-03-24	11-10-11	15-10-19	15-10-19	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	03-03-20	03-03-20	03-03-20	-	-	-	-	-	-	-									
Risk: Construction Environment, Risks, Assessment and Controls Course	☉	13-05-24	13-05-24	13-05-24	13-05-24	13-05-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Safe Driving Awareness (Driver Safety Awareness)	1 year	04-12-24	10-12-24	31-10-24	20-06-23	04-12-24	-	04-12-24	04-12-24	04-12-24	-	04-12-24	04-12-24	04-12-24	04-12-24	-	04-12-24	04-12-24	04-12-24	04-12-24	04-12-24	04-12-24	04-12-24	-	-	-	-	04-12-24	04-12-24	-	-									
Safety Passport (ECITB learner)		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Site Management Safety (SMSTS)	5 years	22-07-24	23-10-23	13-05-22	30-11-21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Site Supervisors Safety (SSSTS)	5 years	-	-	-	-	-	-	-	18-05-22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
SPA Petrol Sector Safety Passport	3 years	-	-	-	-	-	-	-	-	-	-	-	26-03-24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Spill Kit & Spillage Management Training	3 years	16-06-23	16-06-23	16-06-23	16-06-23	27-06-23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Standard Forms - ON SITE 1-2-1 TRAINING BY BJB/KW	☉	04-08-20	07-01-20	05-08-20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Stress Awareness (KW Sending as part of Mental health monthly)	☉	09-09-20	17-05-20	13-05-20	27-09-20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
SWQR: Location & Avoidance of Underground Apparatus (LA)	5 years	-	-	-	-	-	-	-	-	-	-	-	-	01-09-20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Signing Lighting & Guarding (O1)																																								
Telescopic Handler (NPORS)	5 years	-	30-10-23	-	-	-	-	-	-	28-07-20	-	-	29-01-24	-	-	-	-	30-11-18	-	07-02-22	-	-	-	-	-	-	-	-	-	-	-									
Temporary Works Co-ordinator	5 years	-	14-10-21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-									
Thorough Inspection of Harness - COVERED WITHIN IPAF TRAINING	3 years	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	10-03-25	-	10-03-25	-	-	-	-	-	-	-									
Vehicle Marshall (NPORS) & Traffic Banksman	3 years	-	-	-	18-11-21	-	-	-	-	30-06-21	-	-	18-11-21	-	-	02-09-24	-	10-05-22	-	02-09-24	-	-	-	-	-	-	-	-	-	-	02-09-24									
Working Time Directive/Driver Hours & Introduction to Digital Tacograph	☉	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	30-04-19	-	-	-	-	-	-	-	-	-	-	-									

B&E Boys Ltd

Training Matrix 2025 - Site Staff

07 March 2025

Job Roles Key:	Site Manager	SM	Site Supervisor	SS	Joiner	Lab	Maintenance	Main
	Assistant Site Manager	ASM	Graduate Site	GradSM	Plasterer		Decorator	Dec
	Site Engineer	SE	Graduate Site	GradSE	Bricklayer		Apprentice (Speciality)	App
	Property Manager	PM	Assistant Proj	APM	Groundworker		Cleaner	Cle

*Enter the date the training took place - formulas will calculate the re-training requirement as per the following key:

Qualification expired
Training due within next 12 months
Qualification in date
One off training - no requirement for renewal
Not required/No qualification
Future Training

Future Training																															
	No Training																Keighley														
	Position	SM	SM	SM	ASM	PM	Q		Joi	Joi	Joi	Joi	Gro	Gro	Lab	Lab	Lab	Lab	Lab	PD	Main	Main	Main	Dec	Dec	Main	Dec	Bri	AppBri	App	App
	Surname	Bull	Finnegan	Horsfield	Tomlinson	Crowley	Sagar	Boys	Birtwistle	Silcox	Quinton	Wolosianka	Greenwood	Kempson	Twardowski	Martin	Rawstron	Crook	Cascante	Craig	Ashworth	Leigh	Serin	Hynes	Keefe	Barnes	Crawford	Dutton	Dawson	Heywood	Green
	First Name	Craig	John	Andrew	Mark	John	Neil	Brennan	Paul	Jack	Steve (William)	John	Lee	Virgil	Weislaw (Vishy)	Daniel	Harley	John	Miguel	Christian	Craig	Tony	Bill (William)	Stephen	Tony	Keven	Harvey	Samual	Billy	Miller	Finley

Specialisms

Key
Mandatory
Desirable
Conditional
Not required

	Position	SM	ASM	GradSM	GradSE	PM	Joi			Bri	Gro	Lab	Q	PD	Yard	Dec
CSCS	Variable															
DBS Check	3 years															
Driving License (Expiry Date)	10 years															
Face Fit/Qualitative Fitness Test	1 year															
360 Excavator (tracked below 10T)	5 years															
Abrasive Wheels	3 years															
Asbestos Awareness CAT A	1 year															
Asbestos Training Unlicenced CAT B	1 year															
Traffic Banksman	3 years															
Cable Avoidance Tool (Inc Signal Generators) - Operator Training	3 years															
Confined Spaces																
Counter Balance Lift Truck (upto and including 5 tonne - includes Fork)	5 years															
CPC Driver Training	5 years															
Diploma in Carpentry & Joinery (QCF) - Level 1	⊙															
Diploma in Bench Joinery (QCF) - Level 2	⊙															
Diploma in Site Carpentry (QCF) - Level 3	⊙															
Eco Driving & Safe Loading	⊙															
Euromix Silo	2 years															
First Aid At Work	3 years															
Forward Tipping Dumper (Wheeled)	5 years															
Gas Powered Nail Gun - Operator Training	3 years															
Health and Safety Awareness	3 years															
Health and Safety Awareness:	3 years															
Manual Handling																
Health and Safety Awareness:	3 years															
Work At Height																
Health and Safety Awareness:	3 years															
General Site Health & Safety																
Health and Safety Awareness:	3 years															
Noise and Vibration																
MEWPS/IPAF/PAL (Scissor/Mobile Vertical)	5 years															
MEWPS/IPAF/PAL (Static Boom)	5 years															
MEWPS/IPAF/PAL (Mobile Boom)	5 years															
NEBOSH Certificate in Construction Health & Safety	⊙															
NEBOSH Management of Health & Safety	⊙															
NEBOSH Construction Health & Safety Practical Application	⊙															
NEBOSH Managing & Controlling Hazards in Construction Activities	⊙															
PASMA	5 years															
PAT Testing	2 years															
Ride on Roller	5 years															
Site Management Safety (SMSTS)	5 years															
Site Supervisors Safety (SSSTS)	5 years															
S.P.A Safety Passport	5 years															
Spillage Management Training	3 years															
Telescopic Handler	5 years															
Temporary Works Co-ordinator	5 years															
Working Time Directive/Driver Hours & Introduction to Digital Tacograph	⊙															

6.3 OTHER CONTACTS

United Utilities

Contact: **Emergency Numbers Services**

United Utilities (Electricity) - 0800 1954141

Transco (Gas) - 0800 111 999

United Utilities (Water) - 0845 746 22 00

ACCIDENT AND EMERGENCY

Royal Oldham Hospital

Rochdale Road, Oldham, Lancashire, OL1 2JH

Phone: 0161 624 0420

Distance: Drive 3.8 miles, 10 min

EMERGENCY SERVICES PHONE NUMBER 999

HSE

Health and Safety Executive

Redgrave Court

Merton Road

Bootle

Merseyside

L20 7HS

Tel: 0151 951 4000

6.4 PRE-SELECTION PROCEDURES FOR SUBCONTRACTORS

Prior to the placement of our Subcontract Order the following information must be provided to ourselves in order that we can comply with the Construction (Design and Management) Regulations 2007.

INFORMATION REQUIRED

1. Health & Safety Policy
2. Site specific risk assessments
3. COSHH assessment/safety data sheets
4. Method statement for carrying out the works
5. Details of previous contracts of a similar nature
6. Details of Health & Safety/Training participated in and copies of certificates
7. Notifiable accidents over the last three years

All replies should be given to the Safety Officer for his assessment and then should be discussed with the Contracts Manager and Site Supervisor.

SUBCONTRACTORS INFORMATION		
General Method Statements/ Risk Assessments	Start on Site Date	Method Statements & Risk Assessment Required by Dates
General Groundworks	TBC	
Concrete work	TBC	
Steel and cladding work	TBC	
Curtain walling/glazing	TBC	
Joinery Works	TBC	
Partition Works	TBC	
Intumescent painting works	TBC	
Electrical and Mechanical works	TBC	
Decoration works	TBC	
Floor Coverings	TBC	

6.5 SITE RULES:

Health and Safety Rules for Site Operatives and Visitors:

1. INTERACTION BETWEEN PUPILS AND CONTRACTORS IS NOT PERMITTED AT ANY TIME – POLITELY ASK ANY PUPILS TO RETURN TO TEACHING STAFF.
2. NO PHOTOS INCLUDING ANY PUPILS ARE PERMITTED AT ANY TIME.
3. IF SIGNED IN ON SITE YOU ARE SIGNED INTO THE SCHOOL – YOU ARE NOT REQUIRED TO DUPLICATE SIGNING IN. FIRST PERSON SIGNS INTO SITE AND LAST PERSON SIGNS OFF SITE. CONTRACTORS ARE TO WEAR IDENTIFYING PPE AT ALL TIMES.
4. HARD HAT, HI VIS VEST AND SAFETY FOOTWEAR AS A MINIMUM MUST BE WORN AT ALL TIMES ON THIS SITE. DUST MASKS, GLOVES, GOGGLES AND EAR DEFENDERS ARE AVAILABLE FOR YOUR USE AND YOU HAVE BEEN ADVISED TO WEAR THESE WHERE RISK ASSESSMENTS HAVE IDENTIFIED THEIR REQUIREMENT. (NOTE FACE FIT TEST REQUIRED FOR DUST MASKS) PLEASE CONFIRM YOU HAVE RECEIVED THIS.
5. SITE SKIPS MUST BE USED AND THE AREA WHERE WORK IS BEING UNDERTAKEN MUST BE KEPT TIDY FOR HEALTH AND SAFETY REASONS –IF THE WORKING AREA IS LEFT UNTIDY B&E BOYS WILL CONTRA-CHARGE YOU/YOUR EMPLOYER.
6. RADIO'S ARE NOT ALLOWED. IF YOU CAN'T HEAR WHAT IS HAPPENING AROUND YOU – YOU'RE NOT SAFE.
7. FOUL LANGUAGE WILL NOT BE TOLERATED ON SITE, FAILURE TO COMPLY WITH THIS SITE RULE COULD RESULT IN EXPULSION FROM SITE.
8. NO SMOKING OR VAPING IS PERMITTED WITHIN THE BOUNDARY OF THIS SITE. DESIGNATED SMOKING AREA IS OFF SITE AND OUT OF SIGHT OF ANY SCHOOL CHILDREN. WE HAVE A DUTY TO PREVENT FIRE ON THIS SITE.
9. BEFORE COMMENCING WORK YOU MUST INFORM THE SITE SUPERVISOR OF YOUR PRESENCE.
10. NO ALCOHOL/ILLEGAL DRUGS WILL BE TOLERATED ON SITE AND YOU WILL BE INSTANTLY REMOVED IF FOUND. THE SITE MANAGER MAY UNDERTAKE RANDOM TESTS FOR ALCOHOL AT ANY TIME.
11. ALL ACCIDENTS AND DANGEROUS OCCURRENCES ARE TO BE NOTIFIED TO THE SITE SUPERVISOR AND ARE TO BE RECORDED IN THE SITE ACCIDENT BOOK.
12. YOU MUST NOT INTERFERE WITH ANY SCAFFOLDING OR OTHER ACCESS EQUIPMENT ON SITE. REPORT ANY DETERIORATION OF SCAFFOLDING IMMEDIATELY
13. YOU REQUIRE A PERMIT TO WORK FOR:
 - A. HOT WORKS
 - B. WORK ON ELECTRICAL LIVE SERVICES
 - C. WORK INVOLVING THE USE OF CRANES/ERECTION OF STEELWORK
 - D. ROOF WORKS
 - E. CONFINED SPACES
14. YOU MUST NOT OPERATE ANY ITEM OF PLANT UNLESS YOU ARE SPECIFICALLY TRAINED AND CAN PROVIDE PROOF OF TRAINING.

15. NEVER EXCEED THE SWL. OF ANY LIFTING APPLIANCE AND ENSURE NO DEFECTIVE CHAINS, ROPES, OR HOOKS ARE USED.
16. ELECTRIC HAND TOOLS AND EQUIPMENT SHOULD BE 110 VOLTS/BATTERY OPERATED AND DISPLAYS A CURRENT TEST TAG OR CERTIFICATE.
17. YOU SHOULD ONLY USE CARTRIDGE TOOLS IF YOU HAVE THE APPROPRIATE TRAINING CERTIFICATE.
18. YOU SHOULD NOT USE ANY SUBSTANCE WITHOUT PERSONAL PROTECTION PRIOR TO CHECKING THE COSHH ASSESSMENT RECOMMENDATIONS.
19. WELFARE FACILITIES ARE PROVIDED AND YOU WILL HELP TO MAINTAIN THE MESS ROOM, TOILETS ETC. BY KEEPING TIDY AND CLEAN AT ALL TIMES AND NOT ABUSING THE SAME. YOU WILL BE REMOVED FROM SITE IF ANY WILFUL DAMAGE IS CAUSED OR IF YOU DO NOT LEAVE THE WELFARE FACILITIES TIDY.
20. DO NOT WEAR ANY OFFENSIVE T-SHIRTS (I.E. DEATH METAL, ETC). NO BARE TORSO'S TO BE SHOWN.
21. DO NOT ENGAGE WITH VISITING PUBLIC/NEIGHBOURS – DIRECT THEM TO THE SITE MANAGER (IF NECESSARY).
22. YOU WILL BE IMMEDIATELY REMOVED FROM SITE IF YOU DO NOT FOLLOW SITE RULES OR PROCEDURES AS DIRECTED BY THE SITE MANAGER.

6.6 FORM F10

Please see overleaf.

Notification of construction project

Created Date: 05/02/2025

About the location of the site

Address of the construction site	ST JOHNS THORNHAM COFE PRIMARY SCHOOL , THORNHAM LANE, ROCHDALE, MANCHESTER, ENGLAND, M24 2SB
In which local authority is the site address?	Rochdale Metropolitan Borough Council

About the project

Description of project	Demolition and Dismantling: Dem/Dis - Other, Groundworks: Groundworks - Other, Mechanical and Electrical: M&E - Installation, New Build: NB - Other, Refurbishment: Refurbishment - Other, Utilities Work: Utilities Work
Description of the construction work	The Works are the construction of a new 2-storey 0.5FE classroom extension comprising demolitions and alterations, new substructure, superstructure, internal finishes, lift, mechanical and electrical installations and associated external works and drainage.
No of people on site	45
No of contractors on site	15
Start Date	17/02/2025
Time Allowed by Client (in weeks)	64
Duration (in weeks)	59

About those involved in the project

Name	Cranmere Trust	Role	Client
Email	lwright@cranmeredt.org	Tel. Number	0161 785 5082
Address	BLUE COAT C OF E SECONDARY SCHOOL, EGERTON STREET, OLDHAM, ENGLAND, OL1 3SQ		

Name	Halliday Meecham Architects	Role	Principal Designer
Email	PEH@hallidaymeecham.com	Tel. Number	0161 661 5566
Address	HALLIDAY MEECHAM ARCHITECTS LTD, RODWELL TOWER, 111 PICCADILLY, MANCHESTER, ENGLAND, M1 2HY		

Name	B&E Boys	Role	Principal Contractor
Email	john.boys@beboys.co.uk	Tel. Number	01706 234 865
Address	B & E BOYS LTD, TODD CARR ROAD, ROSSENDALE, ENGLAND, BB4 9SJ		

Declaration details

Name	Paul Howitt
Declaration	I have been asked by the client to notify on their behalf, and they have confirmed they are aware of their duties
Date	05/02/2025
Confirmation Email	peh@hallidaymeecham.com

Client Signature (Can be used for your own records, ONLY if required)

Declaration (as stated above)

Name:

Declaration Signature:

Date:

6.7 SITE TRAFFIC MANAGEMENT PLAN

Please refer to Site Logistics Plan (overleaf)



KEY:

- | | | | | | |
|--|--|--|----------------------------|--|-------------------------------------|
| | Building footprint | | Office and shared welfare | | Fire extinguishers point and klaxon |
| | Site boundary – netted heras fencing | | Toilet block | | First aid point |
| | Site boundary – solid timber hoarding | | Personnel gates | | Delivery laydown and storage areas |
| | Vehicular access gates | | Fire Assembly Point | | Proposed tarmac walkway |
| | School Visitors access gate controlled by school | | Temporary tarmac play area | | Proposed stone walkway |

Note: Drawing not to scale

ST JOHN'S THORNHAM – SITE LOGISTICS PLAN

Revision V5


All deliveries will be notified regarding vehicles movements.

Drivers to ring Projects Manager prior to arrival.


Deliveries to off-load in designated area.

All staff, contractors and visitors instructed of traffic management at Site Induction.

Vehicle turning point will be externally of the site.

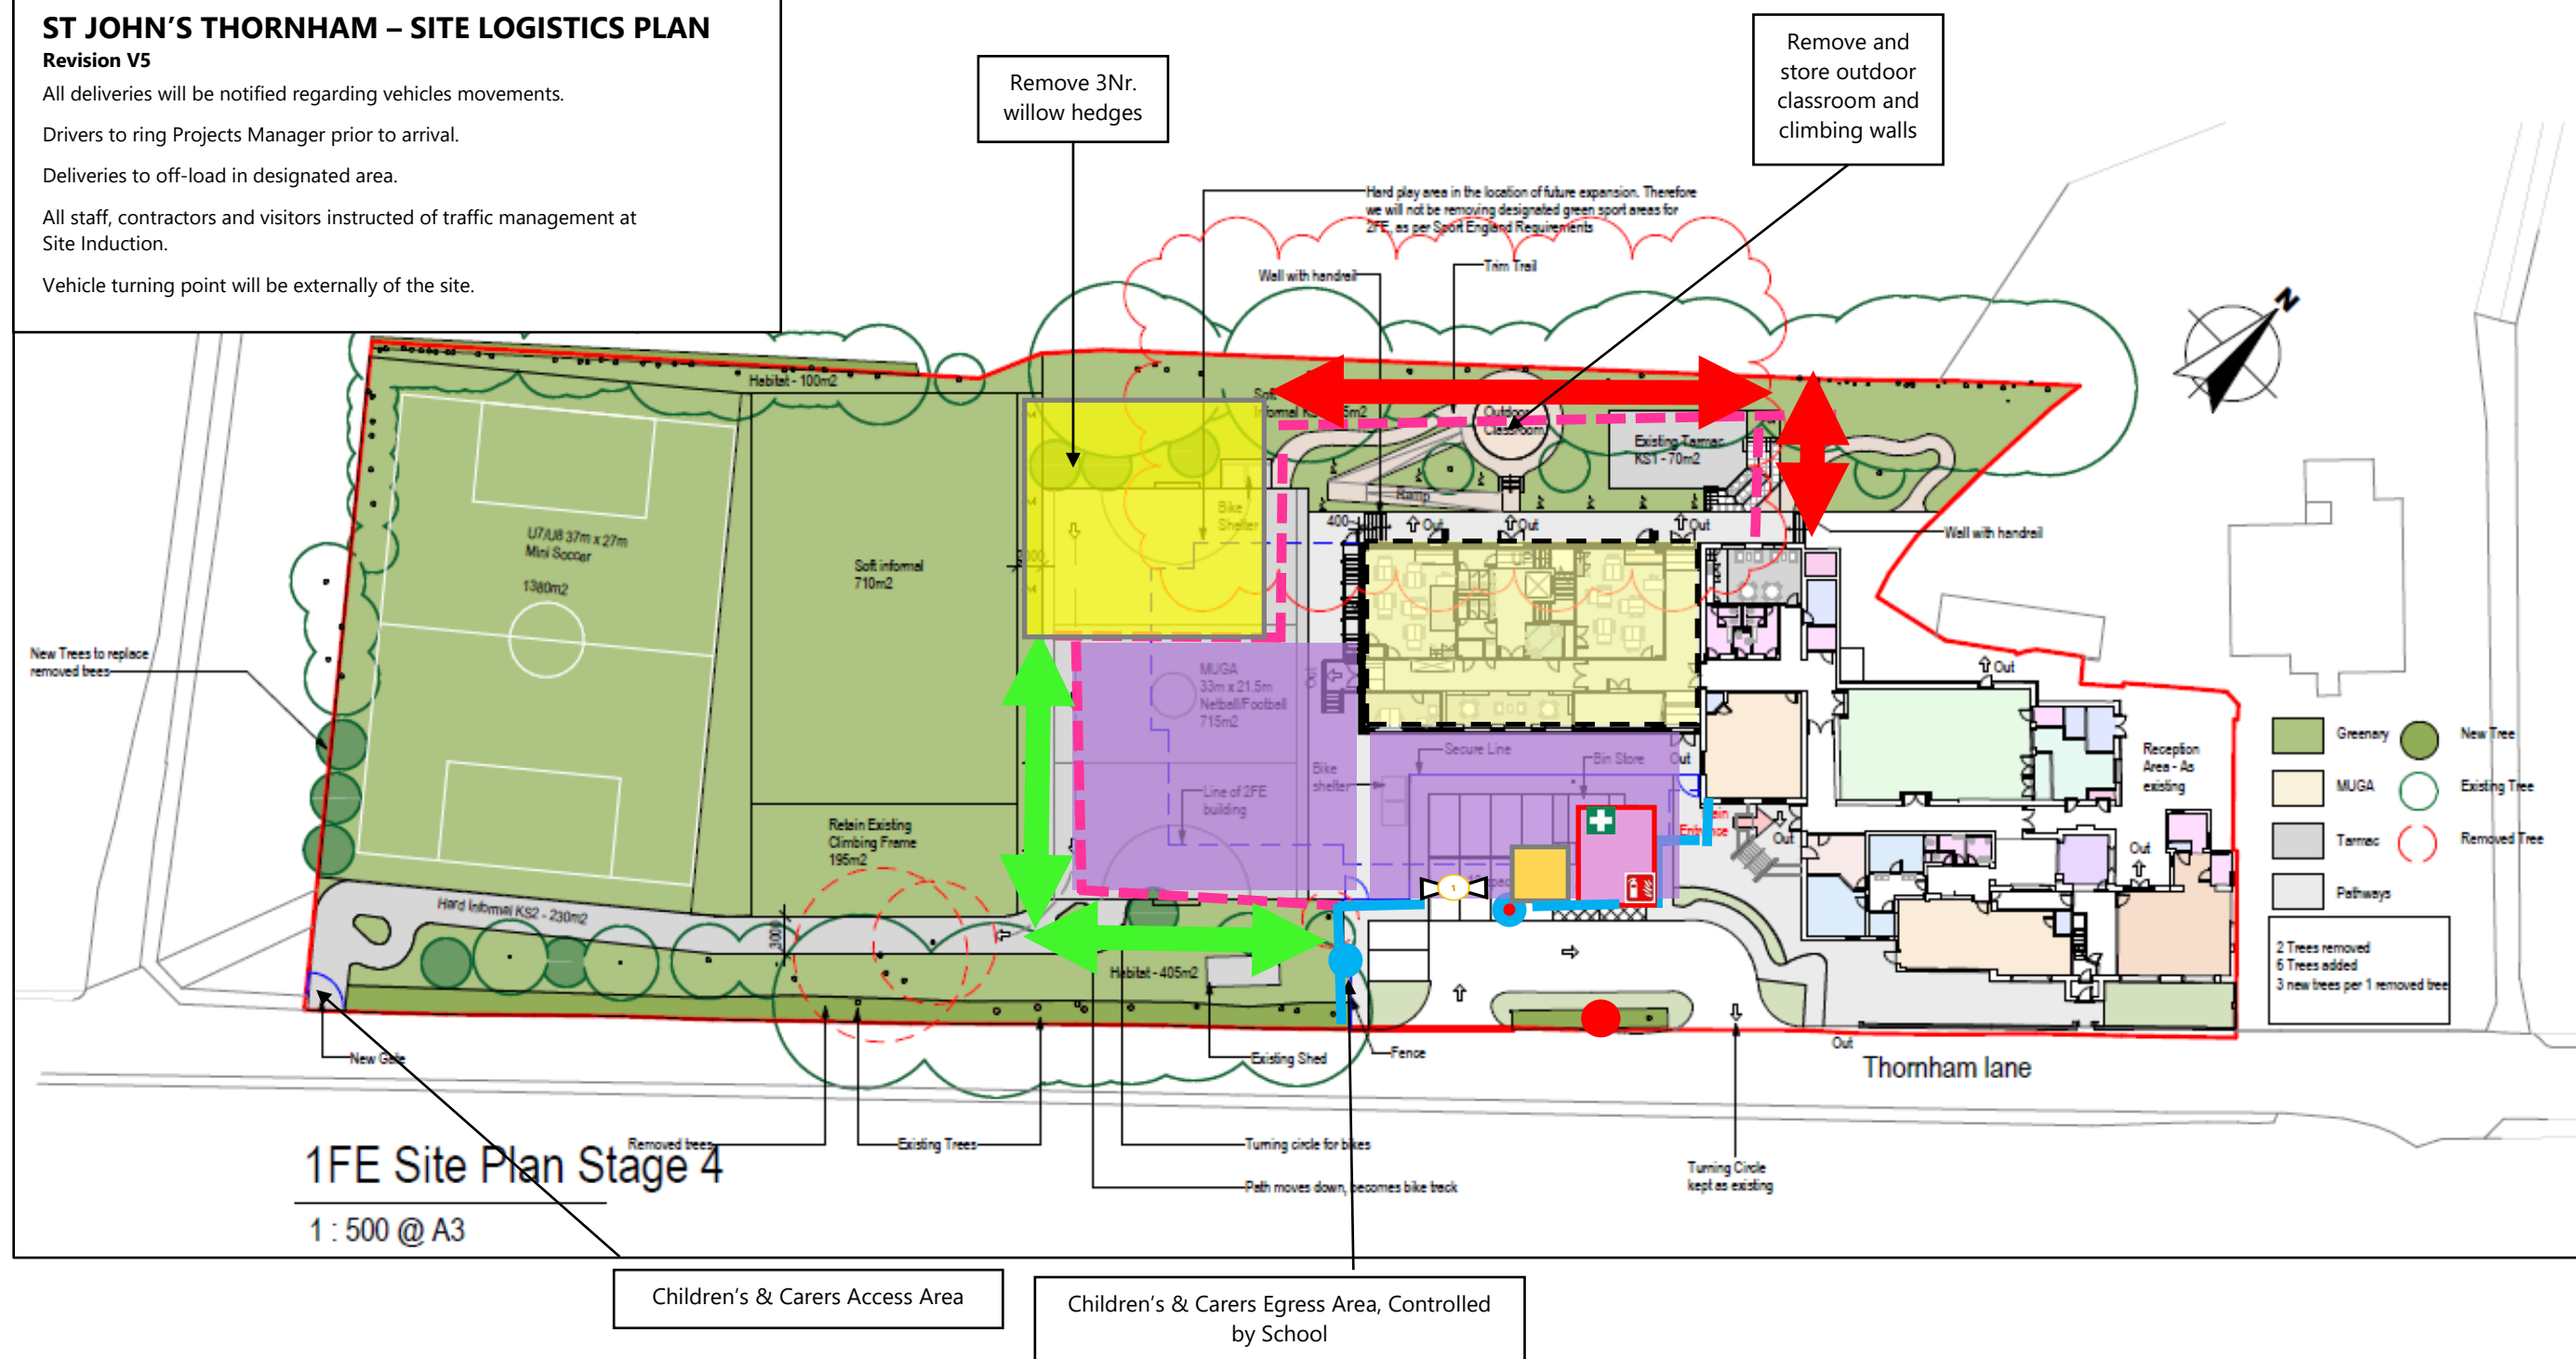

6.8 HOSPITAL LOCATION DIRECTIONS

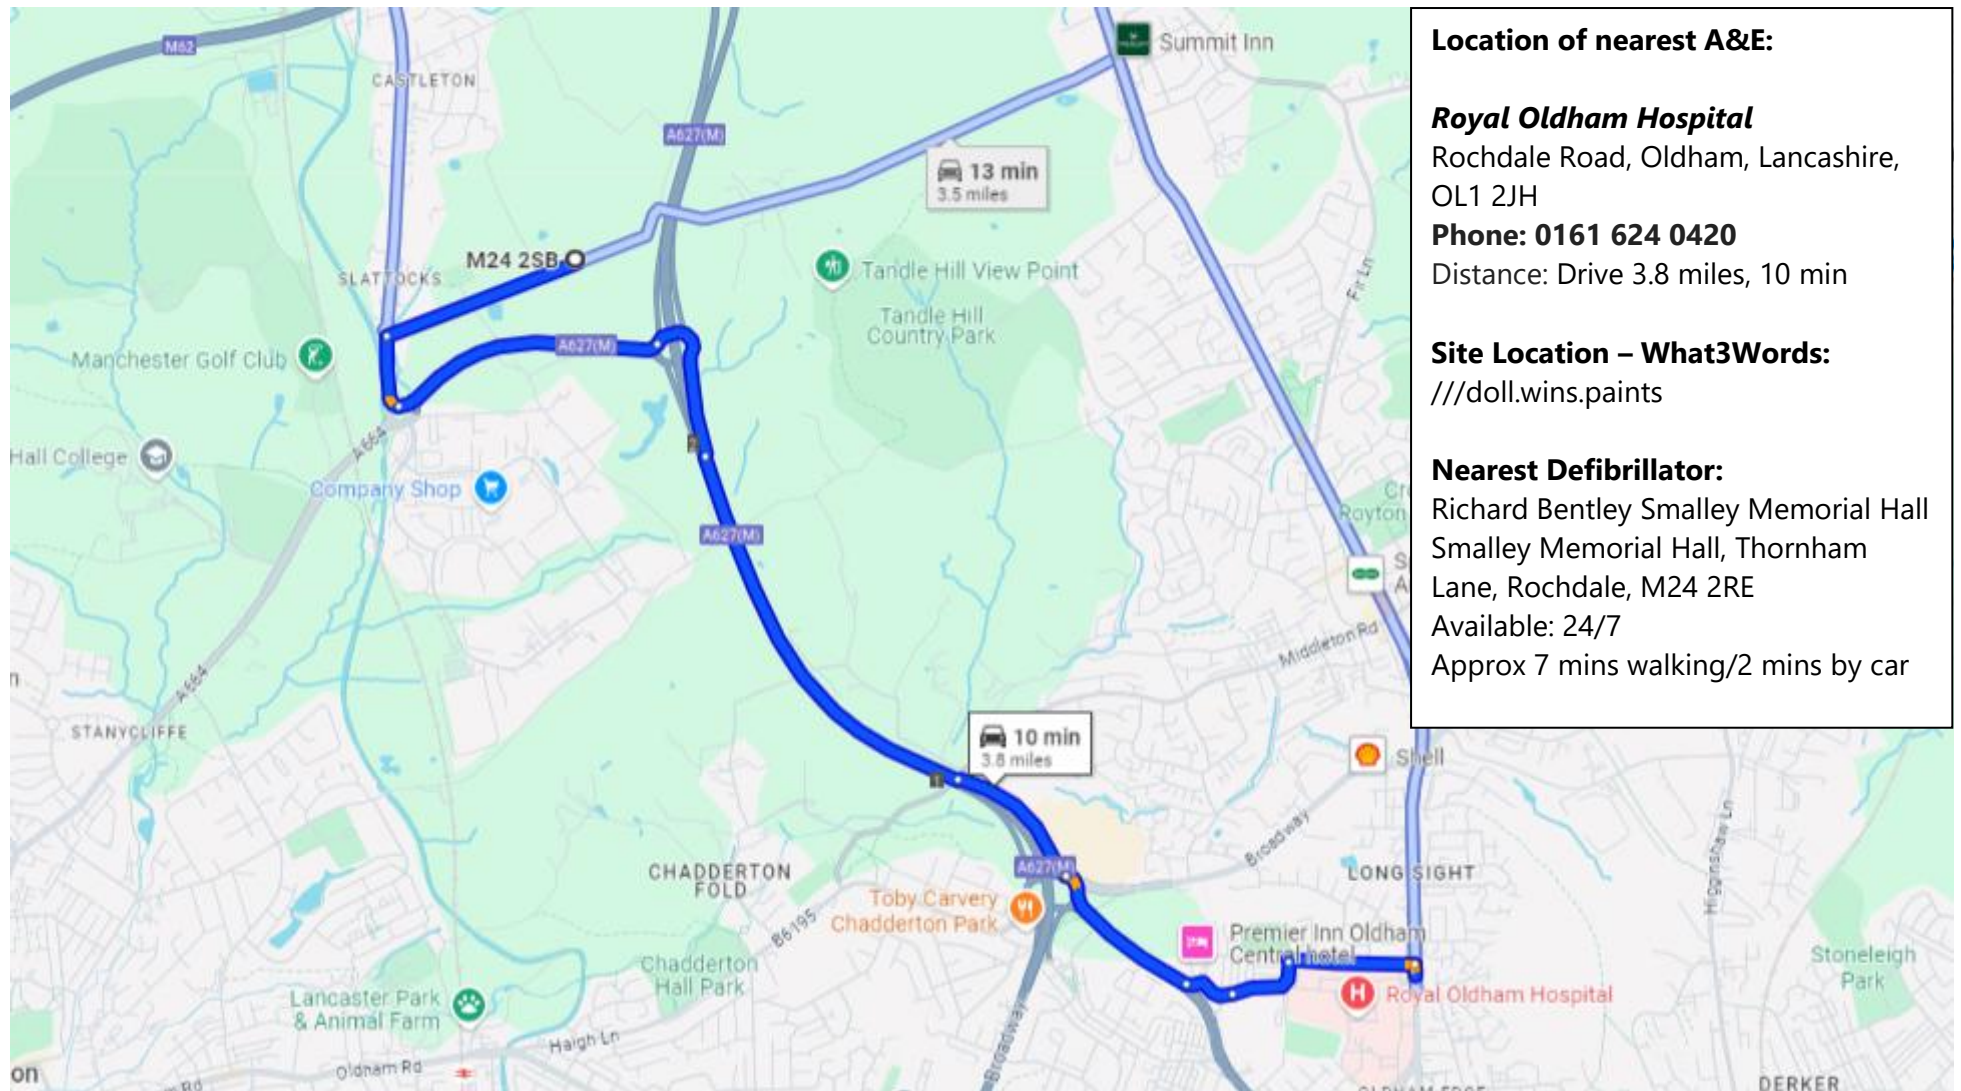

6.9 ACCIDENT INVESTIGATION REPORT

Accident Investigation Report Form

Site Name:

Date of accident:

Name of person/s involved:

Company:

ACCOUNT OF INCIDENT:

WITNESS TO INCIDENT

Name:

Company:

Name:

Company:

STATEMENT 1:

Signature:

Date:

STATEMENT 2:

Signature:

Date:

LIST OF ACTIONS

- 1.
- 2.
- 3.
- 4.
- 5.

CHECKLIST

1. Notification to HSE required? _____
2. Accident book filled in? _____
3. Is site now safe? _____
4. If NO to 3, then what is required?

5. Was there a breach in safety? _____

6. If YES to 5, then by whom? _____

7. Were procedures laid out in safety plan followed?

8. Are amended procedures required?

9. Have all concerned been notified? _____

10 CAN WORK CONTINUE?

Signed: _____

Company: _____

Position: _____

Date: _____

Review Date: _____

Additional information below:

ADDITIONAL STATEMENT:**CONCLUSIONS:**