



e3p

Arboricultural Impact Assessment and Method Statement

Land at Edenfield Road/Greenbooth Road, Norden

Reference: 80-742-R3-3

Date: June 2023



ARBORICULTURAL IMPACT ASSESSMENT AND METHOD STATEMENT

Land at Edenfield Road/Greenbooth Road
Nordon

Prepared for:
Stonebond Properties Ltd

Report Ref: 80-742-R3-3
Date Issued: 21/06/2023

E3P

Taylor Road
Trafford Park
Urmston
Manchester
M41 7JQ

+ 44 (0) 161 707 9612
<https://e3p.co.uk/>

Registered in England
CRN: 08725262

QUALITY ASSURANCE

PROJECT NUMBER	80-742		
VERSION	Version 1	Version 2	Version 3
REMARKS	Final	Minor amendments	Minor amendments
DATE	May 2023	June 2023	June 2023
PREPARED BY	Martin Dilworth	Martin Dilworth	Martin Dilworth
QUALIFICATIONS	FdSc MArborA	FdSc MArborA	FdSc MArborA
CHECKED BY	C. Barlow	C. Barlow	C. Barlow
QUALIFICATIONS	BSc (Hons), MSc, MEnvSc, CEnv, MCIEEM	BSc (Hons), MSc, MEnvSc, CEnv, MCIEEM	BSc (Hons), MSc, MEnvSc, CEnv, MCIEEM
AUTHORISED BY	C. Barlow	C. Barlow	C. Barlow
QUALIFICATIONS	BSc (Hons), MSc, MEnvSc, CEnv, MCIEEM	BSc (Hons), MSc, MEnvSc, CEnv, MCIEEM	BSc (Hons), MSc, MEnvSc, CEnv, MCIEEM



Table of Contents

EXECUTIVE SUMMARY	3
1. BACKGROUND	5
1.1. Purpose of the Report	5
1.2. Site Details	5
1.3. Legislation.....	5
1.4. Town and Country Planning Act 1990 (as amended).	7
1.5. The Hedgerow Regulations 1997	7
1.6. The Planning Process	7
1.6.1. National Planning Policy Framework 2021	8
2. METHODS.....	9
2.1. Site Survey	9
2.2. Constraints.....	9
2.3. Qualifications of the Author	10
3. TREE SURVEY ASSESSMENT	11
3.1. Tree Population Assessment.....	11
3.2. Tree Species Diversity	11
4. IMPACT ASSESSMENT	12
4.1. Tree Removals Due to Development	12
4.2. Mitigation for Tree Loss	12
4.3. General Construction Precautionary Measures.....	13
4.4. Underground Utilities and Drainage.....	13
5. SUMMARY AND CONCLUSIONS.....	14
6. ARBORICULTURAL METHOD STATEMENT	15
6.1. Timing of Works	15
6.2. Site Induction	15
6.3. Tree Protection Fencing.....	15
6.4. Temporary Ground Protection	16
6.5. General Precautionary Measures	17
7. ARBORICULTURIST CONTACT DETAILS	18
APPENDIX I TREE SURVEY SCHEDULE	19
APPENDIX II PHOTOGRAPHS.....	22
APPENDIX III TREE CONSTRAINTS PLAN	24
APPENDIX IV TREE IMPACTS & PROTECTION PLAN	25



EXECUTIVE SUMMARY

Site Address	Land at Edenfield Road/Greenbooth Road, Norden, Rochdale
OS Grid Reference	SD 85744 14731
Site Area	Approximately 2.7 ha
Results	The site survey identified a total of one woodland and two groups of trees on and adjacent the site. These included one woodland graded Category B (trees of moderate value). Two groups of trees graded Category C (trees of low value).
Recommendations	It should be noted that parts of woodland W1 located on and directly adjacent to the site is subject to a Tree Preservation Order (TPO No. 243). Regarding the above it is emphasised that the scheduling or carrying out of any works to trees covered by TPO protection at the site, that are not directly related to the implementation of a detailed (i.e. full) planning permission, must be authorised by the Council's planning department. An appraisal of the documentation provided to date identified the construction of the development as proposed will require part removal of woodland W1. Specific details regarding replacement tree planting should be prepared by a suitably qualified and experienced landscape architect as part of a landscape scheme. Adequate protective fencing as outlined in the Arboricultural Method Statement should be installed around all retained trees, where practical, before any materials and machinery are brought on site. Site operations involving plant with booms, jibs and counterweights should be planned in advance to prevent contact with retained trees. All operations involving such plant in close proximity to trees should be conducted under the supervision of a banksman to ensure that adequate clearance from the retained trees is maintained. All site storage areas, cement mixing and washing points for equipment and vehicles and fuel storage areas should be outside RPAs. No discharge of potential contaminants should occur within the RPA of a retained tree stem or where there is a risk of run off into RPA. All tree works should be carried out by a competent arborist in accordance with BS 3998:2010, Tree Work Recommendations. This document encloses a Preliminary Arboricultural Method Statement, which provides guidance on tree protection measures and mitigation. Site operations involving plant with booms, jibs and counterweights should be planned in advance to prevent contact with retained trees. All operations involving such plant in close proximity to trees should be conducted under the supervision of a banksman to ensure that adequate clearance from the retained trees is maintained.



	All site storage areas, cement mixing and washing points for equipment and vehicles and fuel storage areas should be outside RPAs. No discharge of potential contaminants should occur within the RPA of a retained tree stem or where there is a risk of run off into RPA. All tree works should be carried out by a competent arborist in accordance with BS 3998:2010, Tree Work Recommendations. This document encloses a Preliminary Arboricultural Method Statement, which provides guidance on tree protection measures and mitigation.
--	---



1. BACKGROUND

1.1. PURPOSE OF THE REPORT

E3P Ltd have been instructed by Stonebond Properties Ltd to produce an Arboricultural Impact Assessment (AIA) and Method Statement relating to a proposed residential development at land at Edenfield Road/Greenbooth Road, Norden, Rochdale, hereafter referred to as 'the site'.

The purpose of the report is to:

- ✿ Assess the quality of the trees on and immediately adjacent to the site, in accordance with British Standards (2012)¹, hereafter referred to as 'BS5837: 2012'.
- ✿ Identify trees suitable for retention and for removal due to the proposed development.
- ✿ Prescribe tree protection measures to ensure that retained trees survive the proposed development and thrive after its completion.
- ✿ Prescribe arboricultural recommendations for the long-term management of trees on the site.
- ✿ If necessary, to assess the site for its suitability for mitigation planting, and to specify planting requirements.

1.2. SITE DETAILS

The site is located at Edenfield Road/Greenbooth Road, Norden, Rochdale and is within the administrative boundaries of Rochdale Metropolitan Borough Council. The site includes two large former industrial buildings and consists of bare ground, scrub, broad-leaved woodland and neutral grassland. The boundaries are a combination of walls and a wet ditch. Residential dwellings with mature gardens occur to the south. The site is mostly enclosed by mature woodland.

Cranfield (2023)² identified the soil type of the site and the surrounding area as slowly permeable seasonally wet acid loamy and clayey soils. No further detailed soil analysis was undertaken.

1.3. LEGISLATION

Correspondence with Rochdale Metropolitan Borough Council, on the 09th May 2023 has established parts of woodland W1 is protected by Tree Preservation Order (TPO No. 243). The Green hatched areas on image 1 below represents protected trees.


Regarding the above it is emphasised that the scheduling or carrying out of any works to trees covered by TPO protection at the site, that are not directly related to the implementation of a detailed (i.e. full) planning permission, must be authorised by the Council's planning department.

¹ British Standards (2012). *BS5837: 2012 - Trees in Relation to Design, Demolition and Construction: Recommendations*. British Standards Institute, London

² Cranfield (2023). *Soilscapes* [online]. Available at: >www.landis.org.uk< [accessed 08th May 2023]



Image 1 Tree Preservation Order

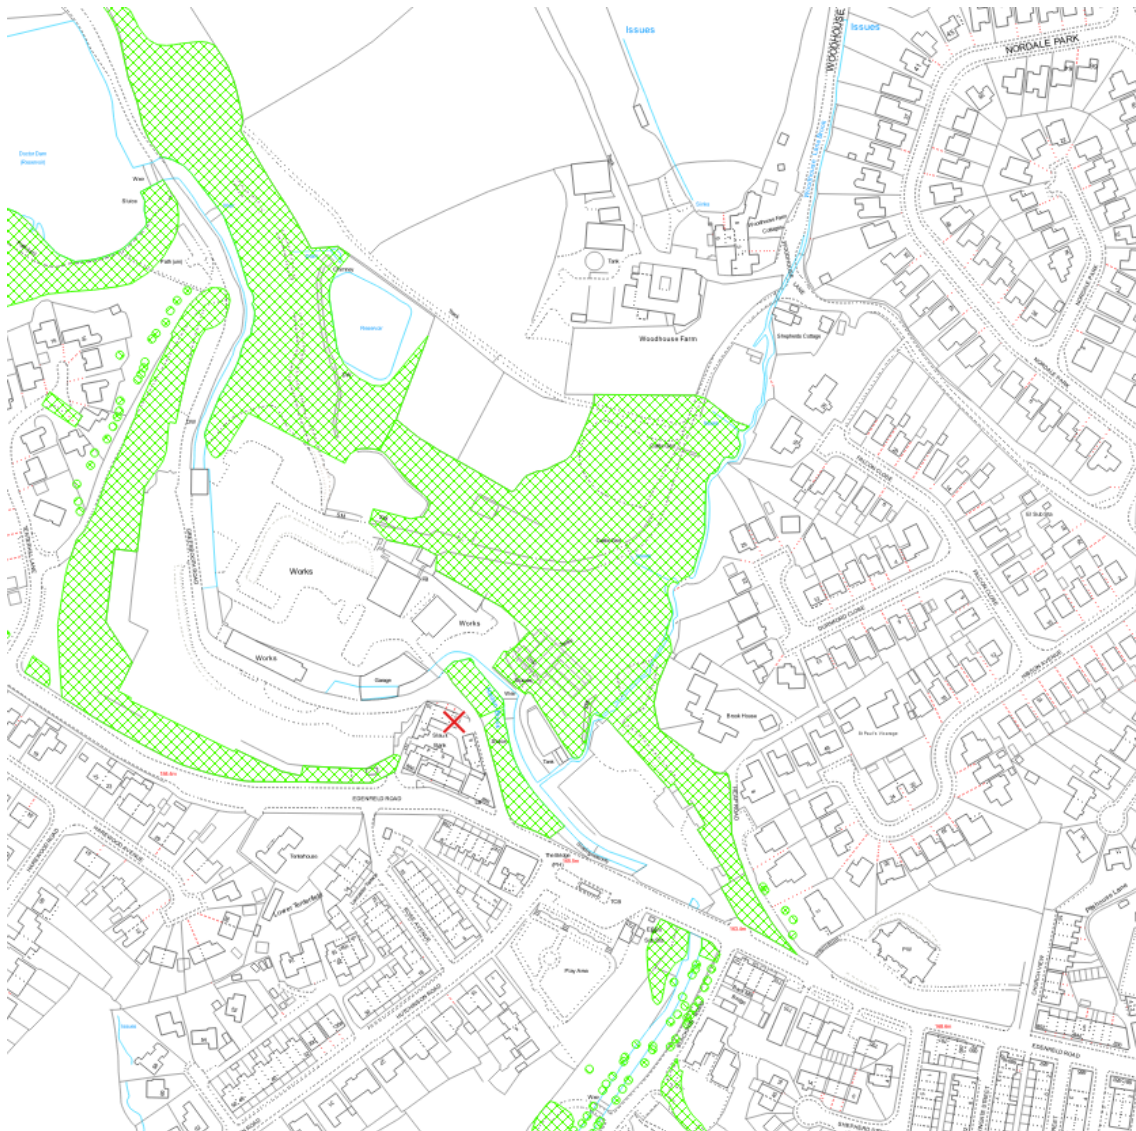

The Town and Country Planning (Tree Preservation) (England) Regulations 2012 make provision for, amongst other things, the form of Tree Preservation Orders (TPOs) and for applications for consent to carry out work on trees subject to an order. The order makes it an offence to cut down, uproot, prune, lop or damage the tree (including the roots) in question without first obtaining the Council's consent. A TPO can apply to a single tree, a group of trees or woodland. Anyone who wishes to fell or carry out work to a tree protected by a TPO must apply to the Council to obtain permission.

There are exemptions for statutory undertakers under the Town and Country Planning Regulations which include where the land on which the tree is situated is operational land of the statutory undertaker and the work is necessary; and in the interests of the safe operation of the undertaking;



- ✳ In connection with the inspection, repair or renewal of any sewers, mains, pipes, cables or other apparatus of the statutory undertaker.
- ✳ To enable the statutory undertaker to carry out development permitted by or under the Town and Country Planning (General Permitted Development) Order 1995. This is only where works are within an operational site and does not include works outside of operational sites.

Where works are granted planning permission no additional specific permission in regard to works to TPOs is required.

1.4. TOWN AND COUNTRY PLANNING ACT 1990 (AS AMENDED).

Conservation Areas are protected under the Town and Country Planning Act 1990 (as amended). Where trees within a Conservation Area are not a TPO permission must also be obtained by the Local Planning Authority (LPA) under a Section 211 notice, which gives the LPA the opportunity to consider protecting a tree. The exception is when a tree is less than 7.5 cm in diameter, measures 1.5 m above ground or 10 cm if thinning to help the growth of other trees.

1.5. THE HEDGEROW REGULATIONS 1997

The Hedgerow Regulations 1997 protect 'Important' hedgerows by controlling their removal through a system of notification. Under the Regulations, it is unlawful to remove or destroy most countryside hedgerows (excluding those forming garden boundaries) without the written permission of the LPA. The legislation details criteria to determine whether a hedgerow qualifies as an 'Important' hedgerow. Schemes with planning consent will not require further approval from the LPA. Where hedgerows meet the criteria of the Regulations to be 'Important hedgerows' a formal request will need to be made to the LPA for its removal.

There are some other exceptions including for carrying out work for the purpose of flood defence or land drainage, pursuant to, or under, the Land Drainage Act 1991, the Water Resources Act 1991 or the Environment Act 1995.

1.6. THE PLANNING PROCESS

The National Planning Policy Framework (NPPF 2021) seeks to ensure that new development is sustainable and underlines the importance of green infrastructure, of which trees form an integral part. This includes recognition of the importance of trees in relation to the management of air, soil and water quality along with other associated ecosystem services and climate change adaption. The NPPF also seeks to achieve the protection and enhancement of landscapes and a net gain in biodiversity. Finally, it specifically identifies veteran and ancient trees and woodland as a highly valuable and irreplaceable habitat.

Local Planning Authorities (LPA) in the UK have a statutory duty to consider both the protection and planting of trees when considering planning applications. The potential impact of development on all trees (including those not protected by a Tree Preservation Order (TPO) or other statutory designation) is a material consideration in determining a planning application.

BS 5837 provides a framework which sets out how trees should be considered in the planning process and also explicitly applies to development where planning consent is not required.

BS 5837 recommends that a tree survey is undertaken to identify the quality and benefits of trees and the spatial constraints associated with them. This information is then used to produce a Tree Constraints Plan (TCP) illustrating the above and below ground constraints associated with trees (the Root Protection Area (RPA)). The TCP is intended to be used to inform the design process and to identify



those trees considered to be a constraint to development due to the quality and value (in a non-fiscal sense).

Following the production of the final scheme design, an Arboricultural Impact Assessment (AIA) is produced to identify the likely direct and indirect impacts of the proposed development, along with a Tree Protection Plan (TPP) to identify trees to be removed and retained and to illustrate the protection of retained trees. An Arboricultural Method Statement (AMS) is also often required as a condition of planning consent to detail how sensitive operations are to be undertaken in close proximity to retained trees.

These documents and plans are considered the minimum requirement for arboricultural matters within a planning application and are intended to ensure both a long term sustainable and harmonious relationship between existing trees and the proposed development.

1.6.1. NATIONAL PLANNING POLICY FRAMEWORK 2021

At the heart of the National Planning Policy Framework (NPPF) is a presumption in favour of sustainable development, and specifically states that for decision making, the LPA should be approving development proposals that accord with the development plan without delay.

Section 15 of the NPPF recognises the importance of conserving and enhancing the natural environment, and specifically acknowledges the role of trees and woodland in the provision of natural capital and ecosystem services.

It further acknowledges the importance of ancient woodlands and veteran trees for habitats and biodiversity and requires that planning consent should be refused where development schemes require the removal of such features unless there are wholly exceptional reasons, stating that:

It was confirmed that there are no designated ancient woodlands within the survey area.



2. METHODS

2.1. SITE SURVEY

The site survey was carried out by Martin Dilworth on 3rd April 2023. All trees on site were inspected from ground level, using the Visual Tree Assessment (VTA) method. Any notable defects of trees were recorded, although the site survey did not constitute a full tree safety assessment.

Tree heights and crown clearances were measured to the nearest 0.5 m with a clinometer. Crown spreads of trees were measured on their north, east, south and west aspects to the nearest 0.5 m. The Diameter at Breast Height (DBH) of trees was measured to the nearest 1 cm, and was used to calculate the Root Protection Area (RPA) of trees using methods prescribed in BS 5837:2012.

In accordance with BS 5837:2012, trees were classified as either A, B, C or U using the criteria shown in Table 2.1. Trees were further classified by the subcategories 1, 2 and 3, depending upon whether they had mainly arboricultural, landscape, or cultural qualities. The additional subcategory does not affect the retention value of the tree, e.g. a Category A2 tree does not have a higher retention value than a Category A1 tree.

TABLE 2.1 BS 5837 CASCADE CHART (ADAPTED FROM BRITISH STANDARDS, 2012)

CATEGORY	DEFINITION	RETENTION	COLOUR CODE
CATEGORY A	Trees of high quality with an estimated remaining life expectancy of at least 40 years; trees that are particularly good examples of their species, especially if rare or unusual.	Highly desirable	Light green
CATEGORY B	Trees of moderate quality with an estimated remaining life expectancy of at least 20 years; trees lacking the special quality to merit Category A designation.	Desirable	Dark blue
CATEGORY C	Trees of low quality with an estimated remaining contribution of at least 10 years, or trees with a stem diameter below 150 mm; unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories.	Feasible, but should be removed if posing a constraint to development	Grey
CATEGORY U	Trees that have serious, irremediable, structural and/or physiological defects, including those that will become unviable after removal of other Category U trees.	Unfeasible	Dark red

2.2. CONSTRAINTS

Only trees with a stem diameter greater than 75mm, (measured at 1.5m above ground level), have been included within the survey; however, it should be noted that a number of individual trees and shrubs with a stem diameter of less than 75mm were present within the study area.

Only trees within the likely influence of the proposed development have been included within this report. Any additional trees in the vicinity of the site have been deemed to not be affected by the proposals and have not been included.



Trees are living organisms and as such their health and condition are naturally subject to change over time. Unforeseen future circumstances such as neglect, wilful damage or severe/extreme weather conditions may affect the future health and condition of the trees included in this report.

2.3. QUALIFICATIONS OF THE AUTHOR

Martin Dilworth is a suitably qualified arboricultural consultant, who is a Professional member of the Arboricultural Association, and holds an FdSc in Arboriculture, and the LANTRA Professional Tree Inspection Certificate.



3. TREE SURVEY ASSESSMENT

3.1. TREE POPULATION ASSESSMENT

The site survey identified a total of one woodland and two groups of trees on and adjacent the site. These included one woodland graded Category B (trees of moderate value). Two groups of trees have been graded Category C (trees of low value).

TABLE 3.1 TREE CATEGORIES RECORDED

TREE CATEGORY	NO. OF INDIVIDUAL TREES	NO. OF GROUPS OF TREES	NO. OF HEDGEROWS	NO. OF WOODLANDS
CATEGORY A (TREES OF HIGH QUALITY)	0	0	0	0
CATEGORY B (TREES OF MODERATE QUALITY)	0	0	0	1
CATEGORY C (TREES OF LOW QUALITY)	0	2	0	0
CATEGORY U (TREES OF POOR QUALITY UNSUITABLE FOR RETENTION)	0	0	0	0
TOTALS	0	2	0	1

3.2. TREE SPECIES DIVERSITY

A variety of species were recorded within woodland or groups of trees during the survey and are represented throughout the study area. Species of trees recorded includes Ash (*Fraxinus excelsior*), Goat willow (*Salix caprea*) Oak (*Quercus robur*) and Sycamore (*Acer pseudoplatanus*).

Tree data can be viewed in **Appendix I: Tree Survey Schedule**. A selection of photographs of trees can be viewed in **Appendix II: Photographs**. Tree locations can be viewed in **Appendix III: Tree Constraints Plan**.



4. IMPACT ASSESSMENT

4.1. TREE REMOVALS DUE TO DEVELOPMENT

From the information provided to date it is projected that, as detailed in Table 4.1, construction of the development as proposed will require part removal of woodland W1.

TABLE 4.1 TREE REMOVALS

CATEGORY	TREE REMOVALS	TOTAL NO. OF REMOVALS
CATEGORY A	-	0 trees
CATEGORY B	W1 (partial)	1 woodland (partial)
CATEGORY C	-	0 trees
CATEGORY U	0	0 trees

4.2. MITIGATION FOR TREE LOSS

As detailed on the Tree Impact and Protection Plan, and in Table 4.1, one moderate quality woodland proposed for partial removal in order to facilitate the proposals. Consequently, specific details regarding replacement tree planting should be prepared by a suitably qualified and experienced landscape architect as part of a landscape scheme.

All new tree planting should be in accordance with British Standard 8545: Trees: From Nursery to Independence in the Landscape – Recommendations, 2014³ and all tree works must be carried out by a qualified contractor in accordance with BS3998:2010⁴: Tree Work – Recommendations.

Adequate protection of the Root Protection Areas (RPAs) of retained trees during construction is essential if their long-term viability is to be assured. RPAs, which are calculated through a method provided in BS5837:2012, are ground areas that should be protected by temporary protective fencing as Construction Exclusion Zones (CEZs) throughout the development process, or by temporary ground protection measures thereby keeping the trees' root zones free from disturbance.

³ British Standards Institution (2014) BS 8545: Trees: From nursery to Independence in the Landscape – Recommendations.

⁴ British Standards Institution (2010) BS 3998:2010, Tree Work Recommendations.



4.3. GENERAL CONSTRUCTION PRECAUTIONARY MEASURES

Adequate protective fencing as outlined in the Arboricultural Method Statement should be installed around all retained trees, where practical, before any materials and machinery are brought on site.

Site operations involving plant with booms, jibs and counterweights should be planned in advance to prevent contact with retained trees. All operations involving such plant in close proximity to trees should be conducted under the supervision of a banksman to ensure that adequate clearance from the retained trees is maintained.

All site storage areas, cement mixing and washing points for equipment and vehicles and fuel storage areas should be outside RPAs. No discharge of potential contaminants should occur within the RPA of a retained tree stem or where there is a risk of run off into RPA.

Any fence post excavations Within a trees RPA are to be carried out manually, using hand held tools only, and in accordance with the guidelines set out in section 7.2.1 of BS5837:2012.

All proposed landscaping to be carried out within and close to retained trees' RPAs should be carried out in strict accordance with the guidance detailed in section 8 of BS5837:2012.

4.4. UNDERGROUND UTILITIES AND DRAINAGE

The installation of underground utilities in close proximity to trees can cause serious damage to their roots. As such, it is essential that utilities be routed outside RPAs unless there is no other available option. Where RPAs cannot be avoided then guidelines set out in the National Joint Utilities Group publication 'Volume 4: NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees (Issue 2) – Operatives Handbook' should be followed (e.g. trenches of a very limited width to be hand dug or the use of directional drilling).

To date, there are no proposed works to service and/or drainage in respect of the development under consideration. In order to ensure that utilities and services are either routed outside RPAs where possible or special working methods are used, where required to install services within RPAs, the provision of a bespoke method statement can be conditioned to a planning approval.



5. SUMMARY AND CONCLUSIONS

The site survey identified a total of one woodland and two groups of trees on and adjacent the site. These included one woodland graded Category B (trees of moderate value). Two groups of trees have been graded Category C (trees of low value).

It should be noted that parts of woodland W1 located on and directly adjacent to the site is subject to a Tree Preservation Order (TPO No. 243).

Regarding the above it is emphasised that the scheduling or carrying out of any works to trees covered by TPO protection at the site, that are not directly related to the implementation of a detailed (i.e. full) planning permission, must be authorised by the Council's planning department.

An appraisal of the documentation provided to date identified the construction of the development as proposed will require part removal of woodland W1.

Specific details regarding replacement tree planting should be prepared by a suitably qualified and experienced landscape architect as part of a landscape scheme.

Adequate protective fencing as outlined in the Arboricultural Method Statement should be installed around all retained trees, where practical, before any materials and machinery are brought on site.

Site operations involving plant with booms, jibs and counterweights should be planned in advance to prevent contact with retained trees. All operations involving such plant in close proximity to trees should be conducted under the supervision of a banksman to ensure that adequate clearance from the retained trees is maintained.

All site storage areas, cement mixing and washing points for equipment and vehicles and fuel storage areas should be outside RPAs. No discharge of potential contaminants should occur within the RPA of a retained tree stem or where there is a risk of run off into RPA.

All tree works should be carried out by a competent arborist in accordance with BS 3998:2010, Tree Work Recommendations.

This document encloses a Preliminary Arboricultural Method Statement, which provides guidance on tree protection measures and mitigation.



6. ARBORICULTURAL METHOD STATEMENT

6.1. TIMING OF WORKS

The phasing of works must be carried out in accordance with Table 6.1.

TABLE 6.1 TIMING OF WORKS

STAGE	WORKS
1	Site induction
2	Install temporary tree protection fencing
3	Inspection by arboriculturist
4	Carry out construction works, subject to precautionary measures
5	Remove tree protection fencing once works complete
6	Final inspection by arboricultural consultant

6.2. SITE INDUCTION

Prior to works commencing, all contractors must attend a site induction. All contractors will be briefed on arboricultural concerns arising from the development proposals, including tree Root Protection Areas (RPAs). This method statement must be made available to all contractors working on the site.

6.3. TREE PROTECTION FENCING

Prior to machinery entering the site, it will be necessary to ensure that all trees are adequately protected. This will require the installation of temporary of tree protection fencing.


Tree protection fencing will consist of a vertical scaffold framework, well braced to resist impacts. The vertical poles must be spaced at a maximum interval of 3 m and driven securely into the ground. Onto this framework, welded mesh panels will be fixed (see Figure 6.1).

Laminated waterproof A3 signs will be fixed securely to fencing panels on each enclosure at 9 m intervals. The signs must clearly read: 'Protected Tree Zone, no storage or operations within fenced off areas'.

Once the construction works have been completed, the tree protection fencing may be removed. This must be done with care to ensure that no damage to trees is caused.



FIGURE 6.1 TREE PROTECTION FENCING SPECIFICATION

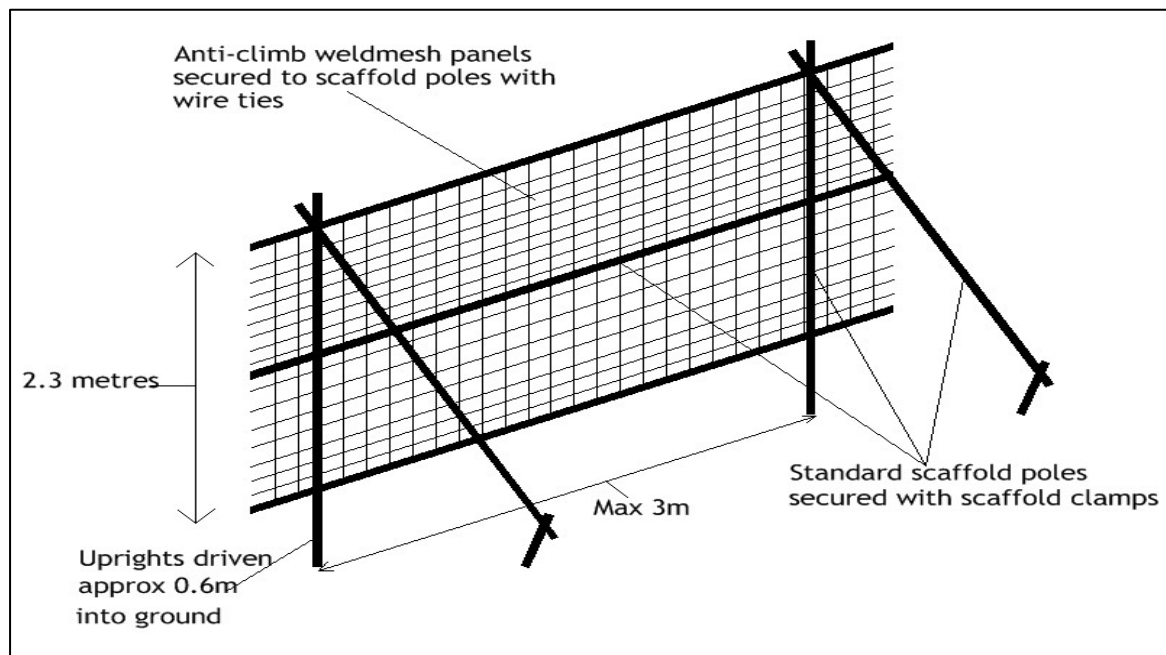

6.4. TEMPORARY GROUND PROTECTION

Any necessary Temporary Ground Protection areas shall conform to Figure 6.2, below, unless otherwise agreed with the LPA.

The Ground Protection Area shall be left undisturbed and covered by a semi-permeable geotextile membrane which shall, in turn, be covered by a compressible layer consisting of a material such as woodchip.


material such as woodchip. Side-butting scaffold boards shall then be fitted to cover the Ground Protection Area.

On completion of installation, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Ground Protection.

The Temporary Ground Protection shall remain in place until completion of the project and only removed following receipt of written permission from the Project Arboriculturist.



FIGURE 6.2 TEMPORARY GROUND PROTECTION

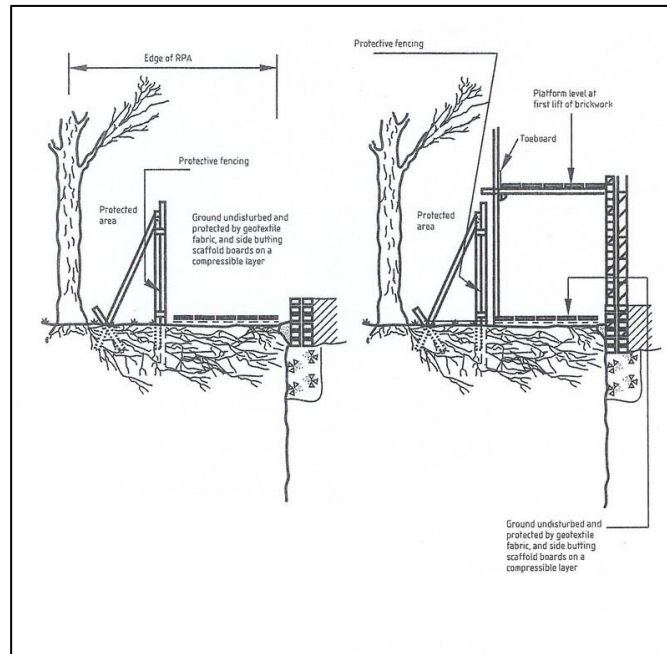

6.5. GENERAL PRECAUTIONARY MEASURES

Prior to works commencing, a site storage area will be designated, which must be outside of the RPAs of trees. No materials hazardous to tree health, such as oil, bitumen or cement will be stored within RPAs of trees. Where possible this area should be extended to 10 m away from the tree protection fencing.

Where there is a risk of polluted water runoff into RPAs, heavy duty plastic sheeting and sandbags will be used to contain any spillages and prevent contamination. No fires will be lit within 20 m of the protective fencing.

If any breach in the tree protection measures occurs, it is the site manager's responsibility to report this to an arboricultural consultant so the appropriate measures may be taken.



7. ARBORICULTURIST CONTACT DETAILS

If at any point during construction works, works are required within RPAs, if there is a breach within the tree protection fencing, and/or if the proposals change from those detailed within the Tree Protection Plan, the project arboriculturist must be consulted immediately. The project arboriculturist's details are below:

Martin Dilworth

E3P
Taylor Road
Trafford Park
Urmston
Manchester
M41 7JQ

trees@e3p.co.uk

Office: 01617079612

END OF REPORT



APPENDIX I TREE SURVEY SCHEDULE

A plan showing tree locations can be viewed in **Appendix III: Tree Constraints Plan**.

TABLE A.1 KEY FOR TREE TABLES

KEY	
SPECIES	Common name and scientific name
HEIGHT	Measured to nearest 0.5 m
C.C	Height of crown clearance, measured to nearest 0.5 m
DBH	Diameter at breast height (1.5 m), in centimetres
CROWN SPREAD	Measured to nearest 0.5 m
AGE	Y - sapling/newly planted tree
	SM - semi-mature; tree in 1/3 of estimated lifespan
	EM - early-mature; tree in 2/3 of estimated lifespan
	M - mature; tree in 3/3 of estimated lifespan
	V - Veteran tree
ERC	Safe useful life expectancy of tree, in years
CATEGORY	See cascade chart (Table 1.1)
#	Estimated value
what3words © 2023 what3words Limited	Geocode system designed to identify location with a resolution of about 3 metres



TABLE A.2 TREE DATA

TREE NO.	SPECIES	HEIGHT (M)	DBH (MM)	CROWN SPREAD				HEIGHT OF C.C	AGE	COMMENTS	ERC	CATEGORY	RPA (M ²)	RPA RADIUS (M)
				N	E	S	W							
W1	Sycamore (<i>Acer pseudoplatanus</i>), Oak (<i>Quercus robur</i>), Goat willow (<i>Salix caprea</i>)	16	600	5	5	5	5	0	M	Unmanaged woodland on steep bank and following water course with derelict buildings and structures. Predominately sycamore species with occasional oak and goat willow.	20+	B2	163	7.2
G1	Sycamore (<i>Acer pseudoplatanus</i>) x 10	10	#300	4	4	4	4	0	EM	Selfseeded trees growing at base of walls. Unable to fully inspect.	10+	C2	41	3.6
G2	Sycamore (<i>Acer pseudoplatanus</i>) x 6, Ash (<i>Fraxinus excelsior</i>) x 3	9	#300	4	4	4	4	0	EM	Self seeded trees on bank and retaining walls next to stream. Unable to fully inspect.	10+	C2	41	3.6



APPENDIX II

PHOTOGRAPHS

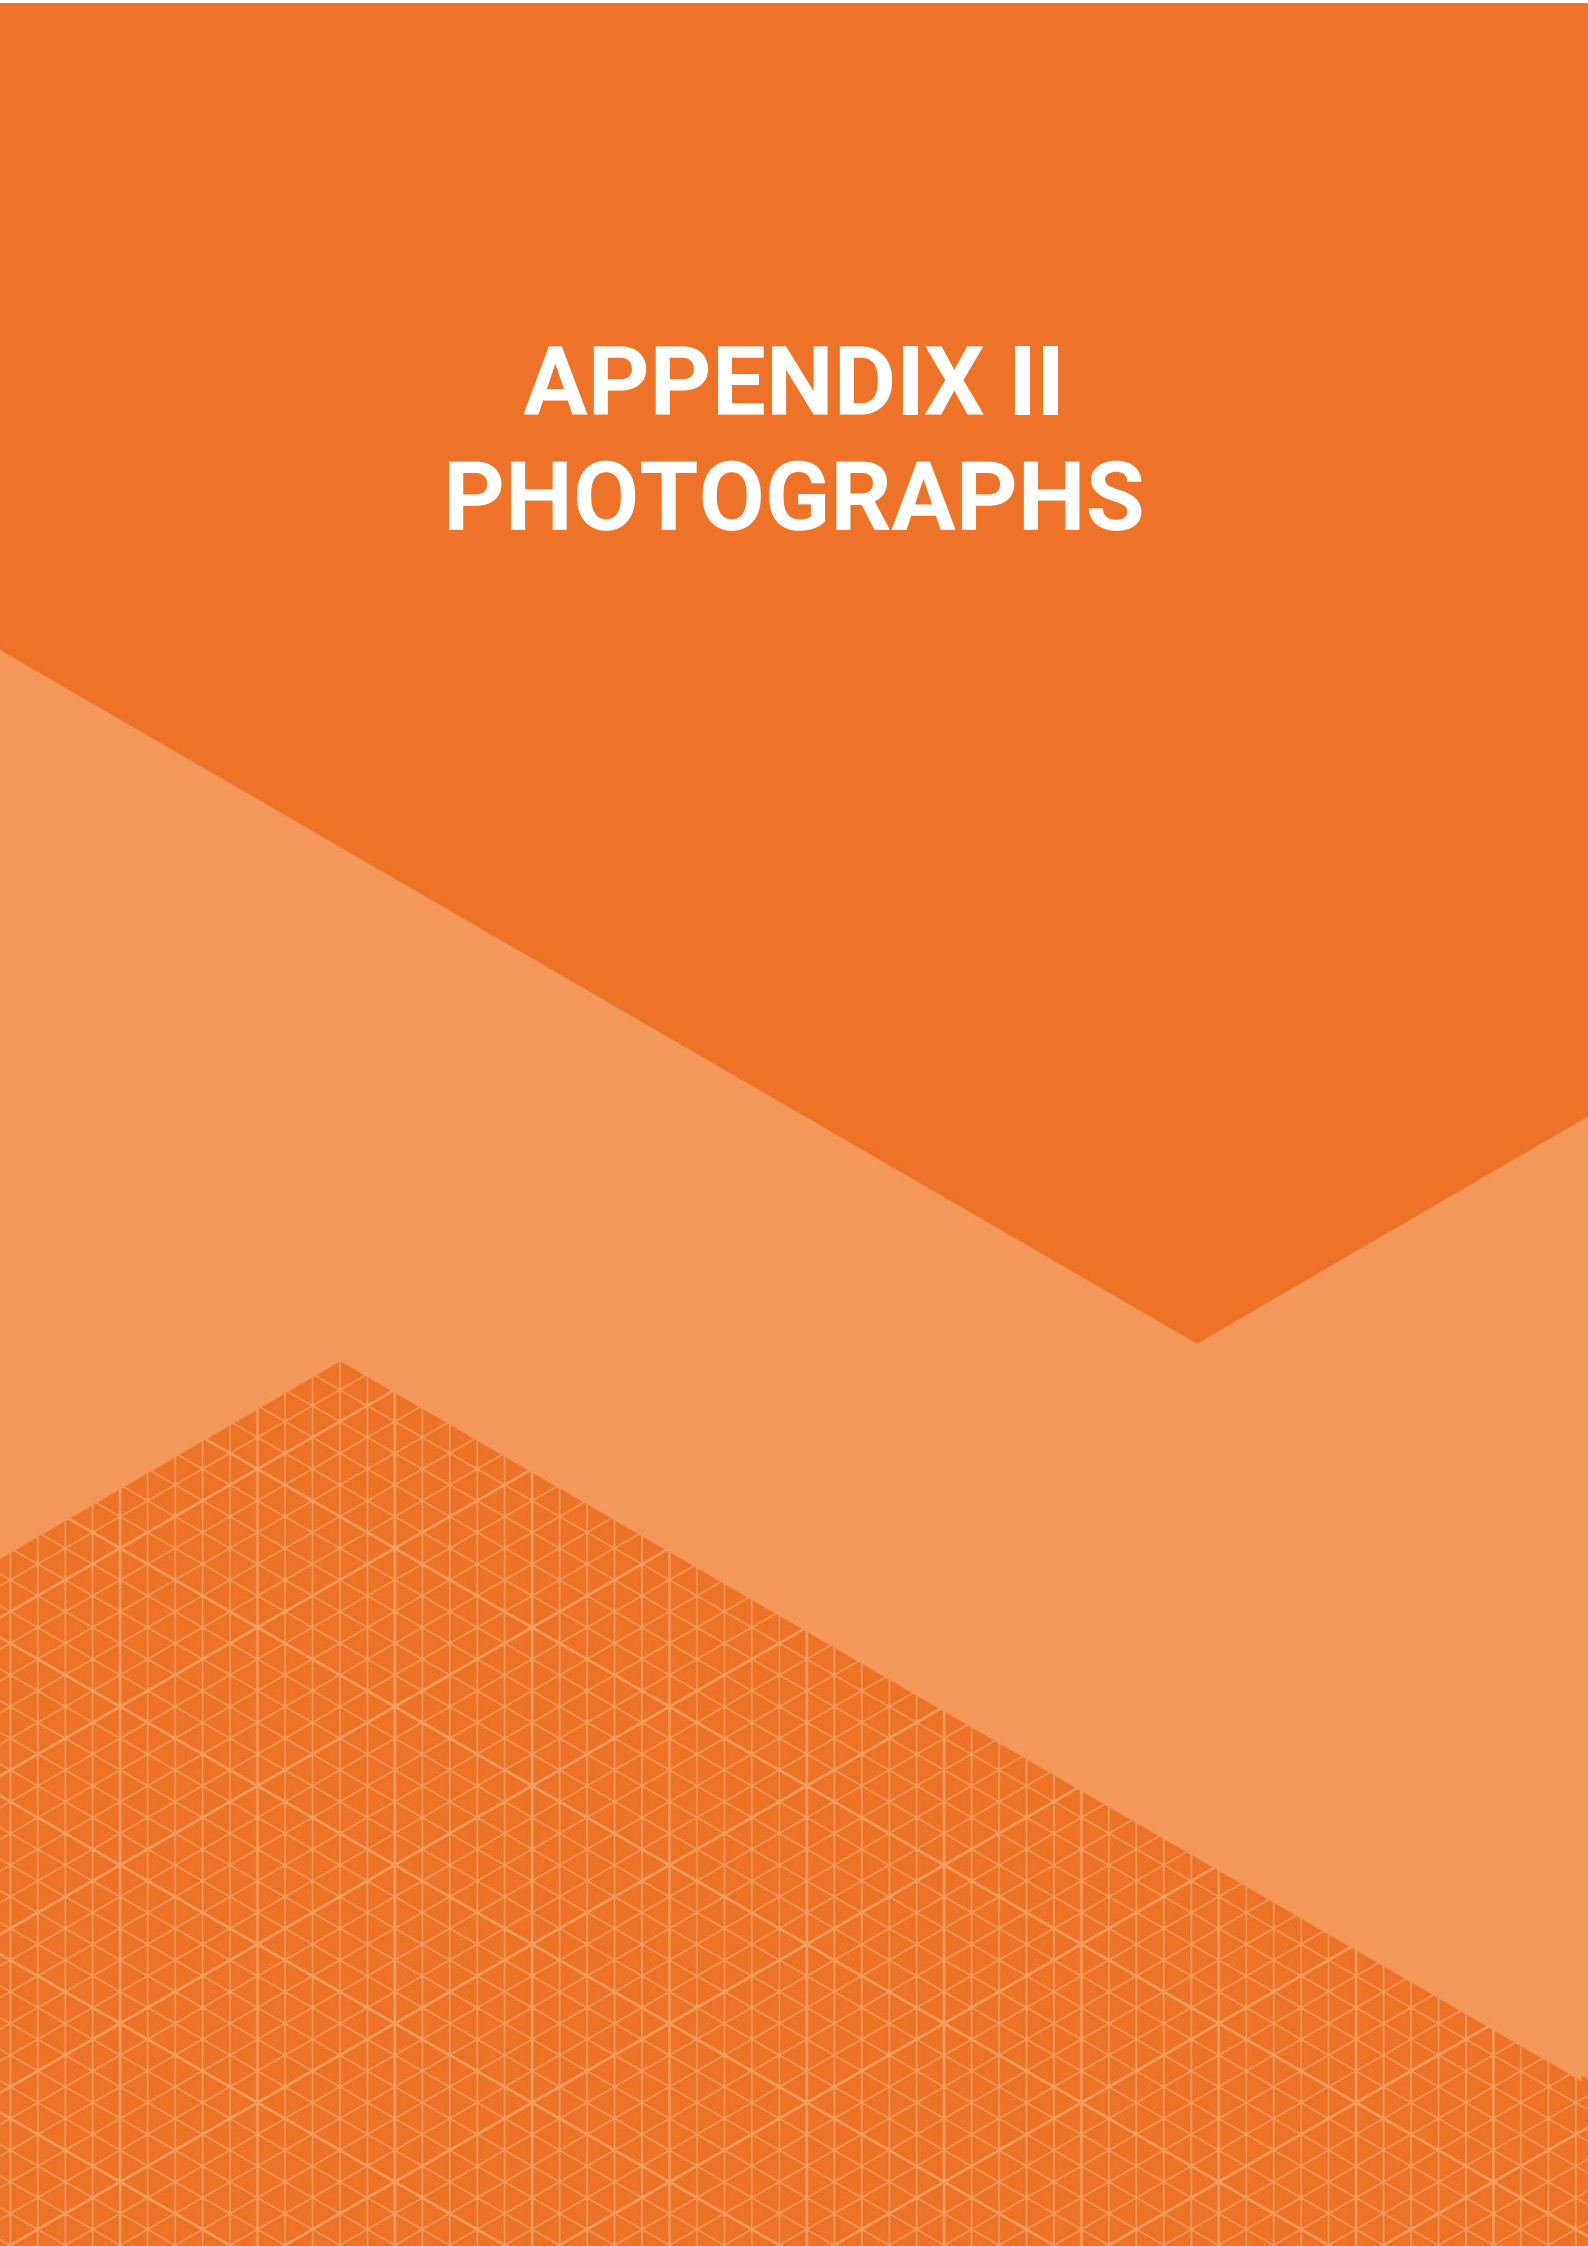
The background of the page is composed of several geometric shapes. A large, dark orange shape occupies the top right. A lighter orange shape is positioned below it, and a third, even lighter orange shape is at the bottom left. The bottom left shape is filled with a fine, light-colored grid pattern. The text 'APPENDIX II' and 'PHOTOGRAPHS' is centered in the upper portion of the page.

PLATE 1 Woodland W1




PLATE 2 Woodland W1




PLATE 3 Group G2




APPENDIX III TREE CONSTRAINTS PLAN

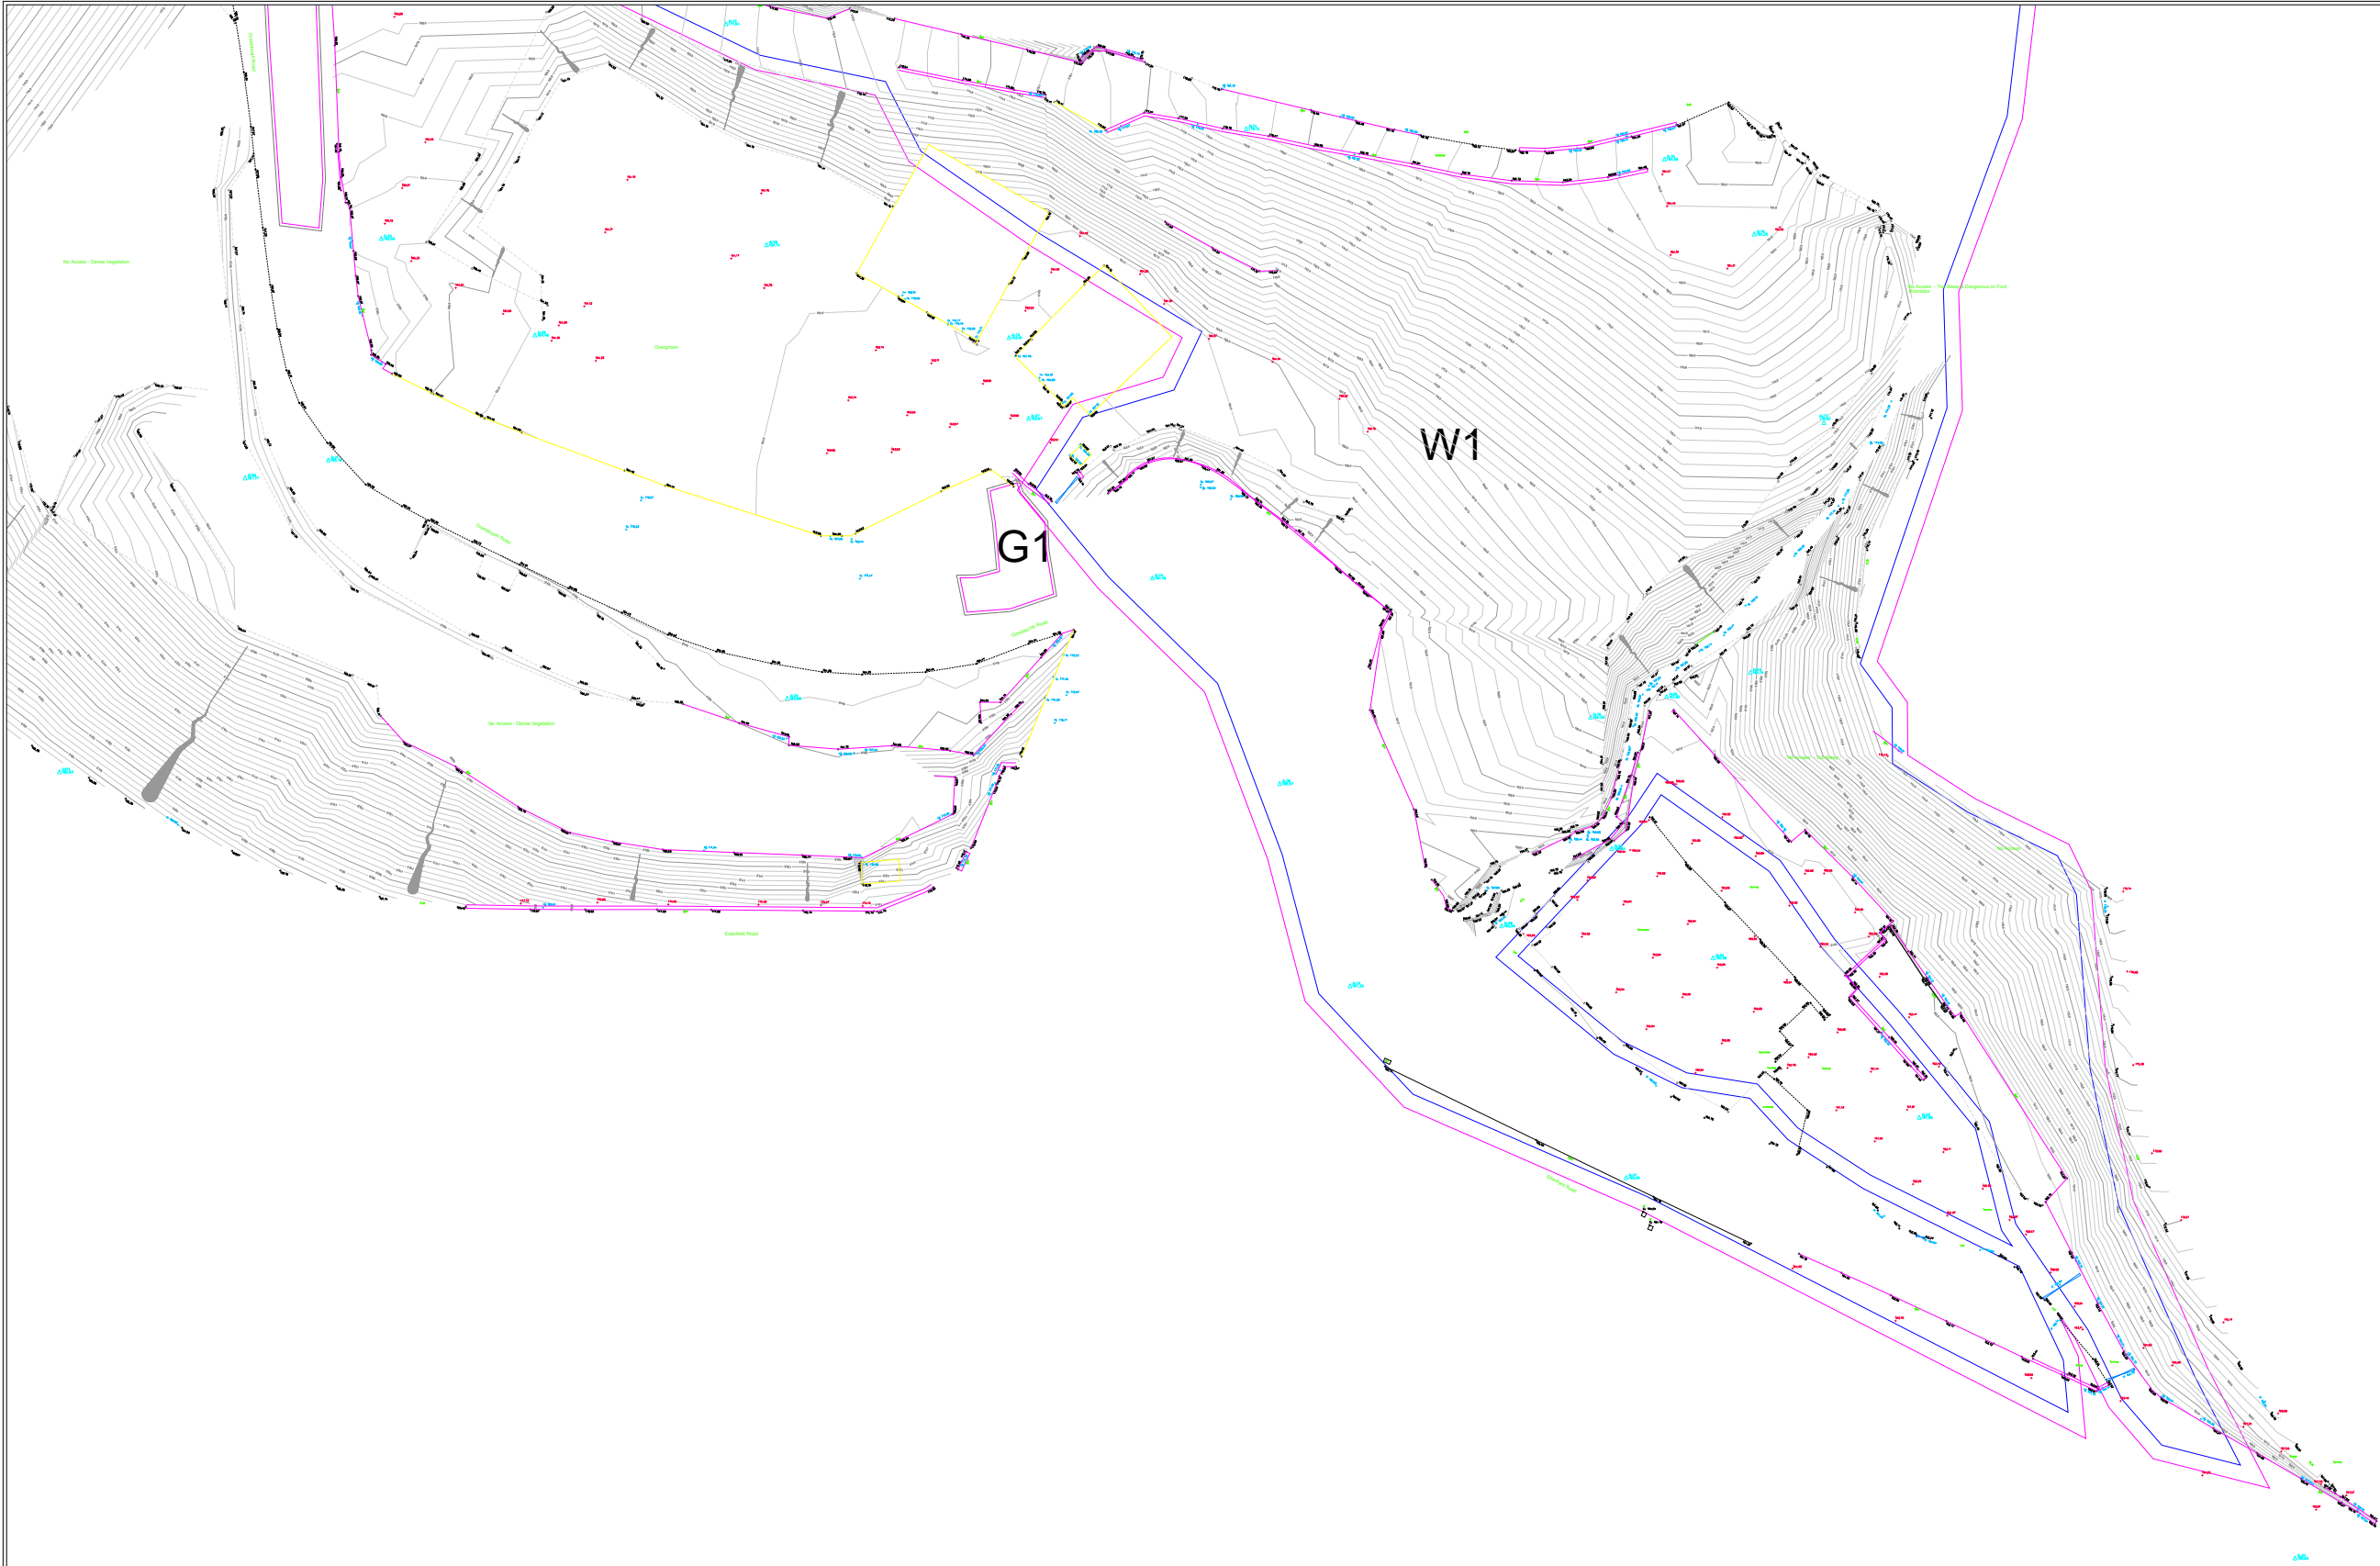

Tree Categorisations:
Those to be Considered for Retention:



Category 'A' Tree/Group/Hedge
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years



Category 'B' Tree/Group/Hedge
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years



Category 'C' Tree/Group/Hedge
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees



Category 'U' Tree/Group/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Those Unsuitable for Retention:

Root Protection Areas (RPAs):



RPAs
Area(s) of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Appended Temporary Protective Fencing Specification

Notes:

The stem location of trees were not included on the topographical survey based site plan provided, and their locations were subsequently plotted by the arboricultural surveyor using GPS siting and estimation at the time of the survey. As such, the plotted locations of these trees cannot therefore be considered to be wholly accurate.

Client:

Stonebond Group Ltd

Job No:

80-742

Date:

03.05.2023

Drawing No:

001

Scale:

1:1000 @ A3



Environmental Engineering Partnership Ltd
Taylor Road, Trafford Park
Urmston, Manchester, M41 7JQ
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

P1	REVA	03.05.2023	MD	MD
Phase	Issue	Date	Drawn	Checked


Job Title:

Greenbooth Road, Norden

Drawing Title:

Tree Constraints Plan
Sheet 1 of 2

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

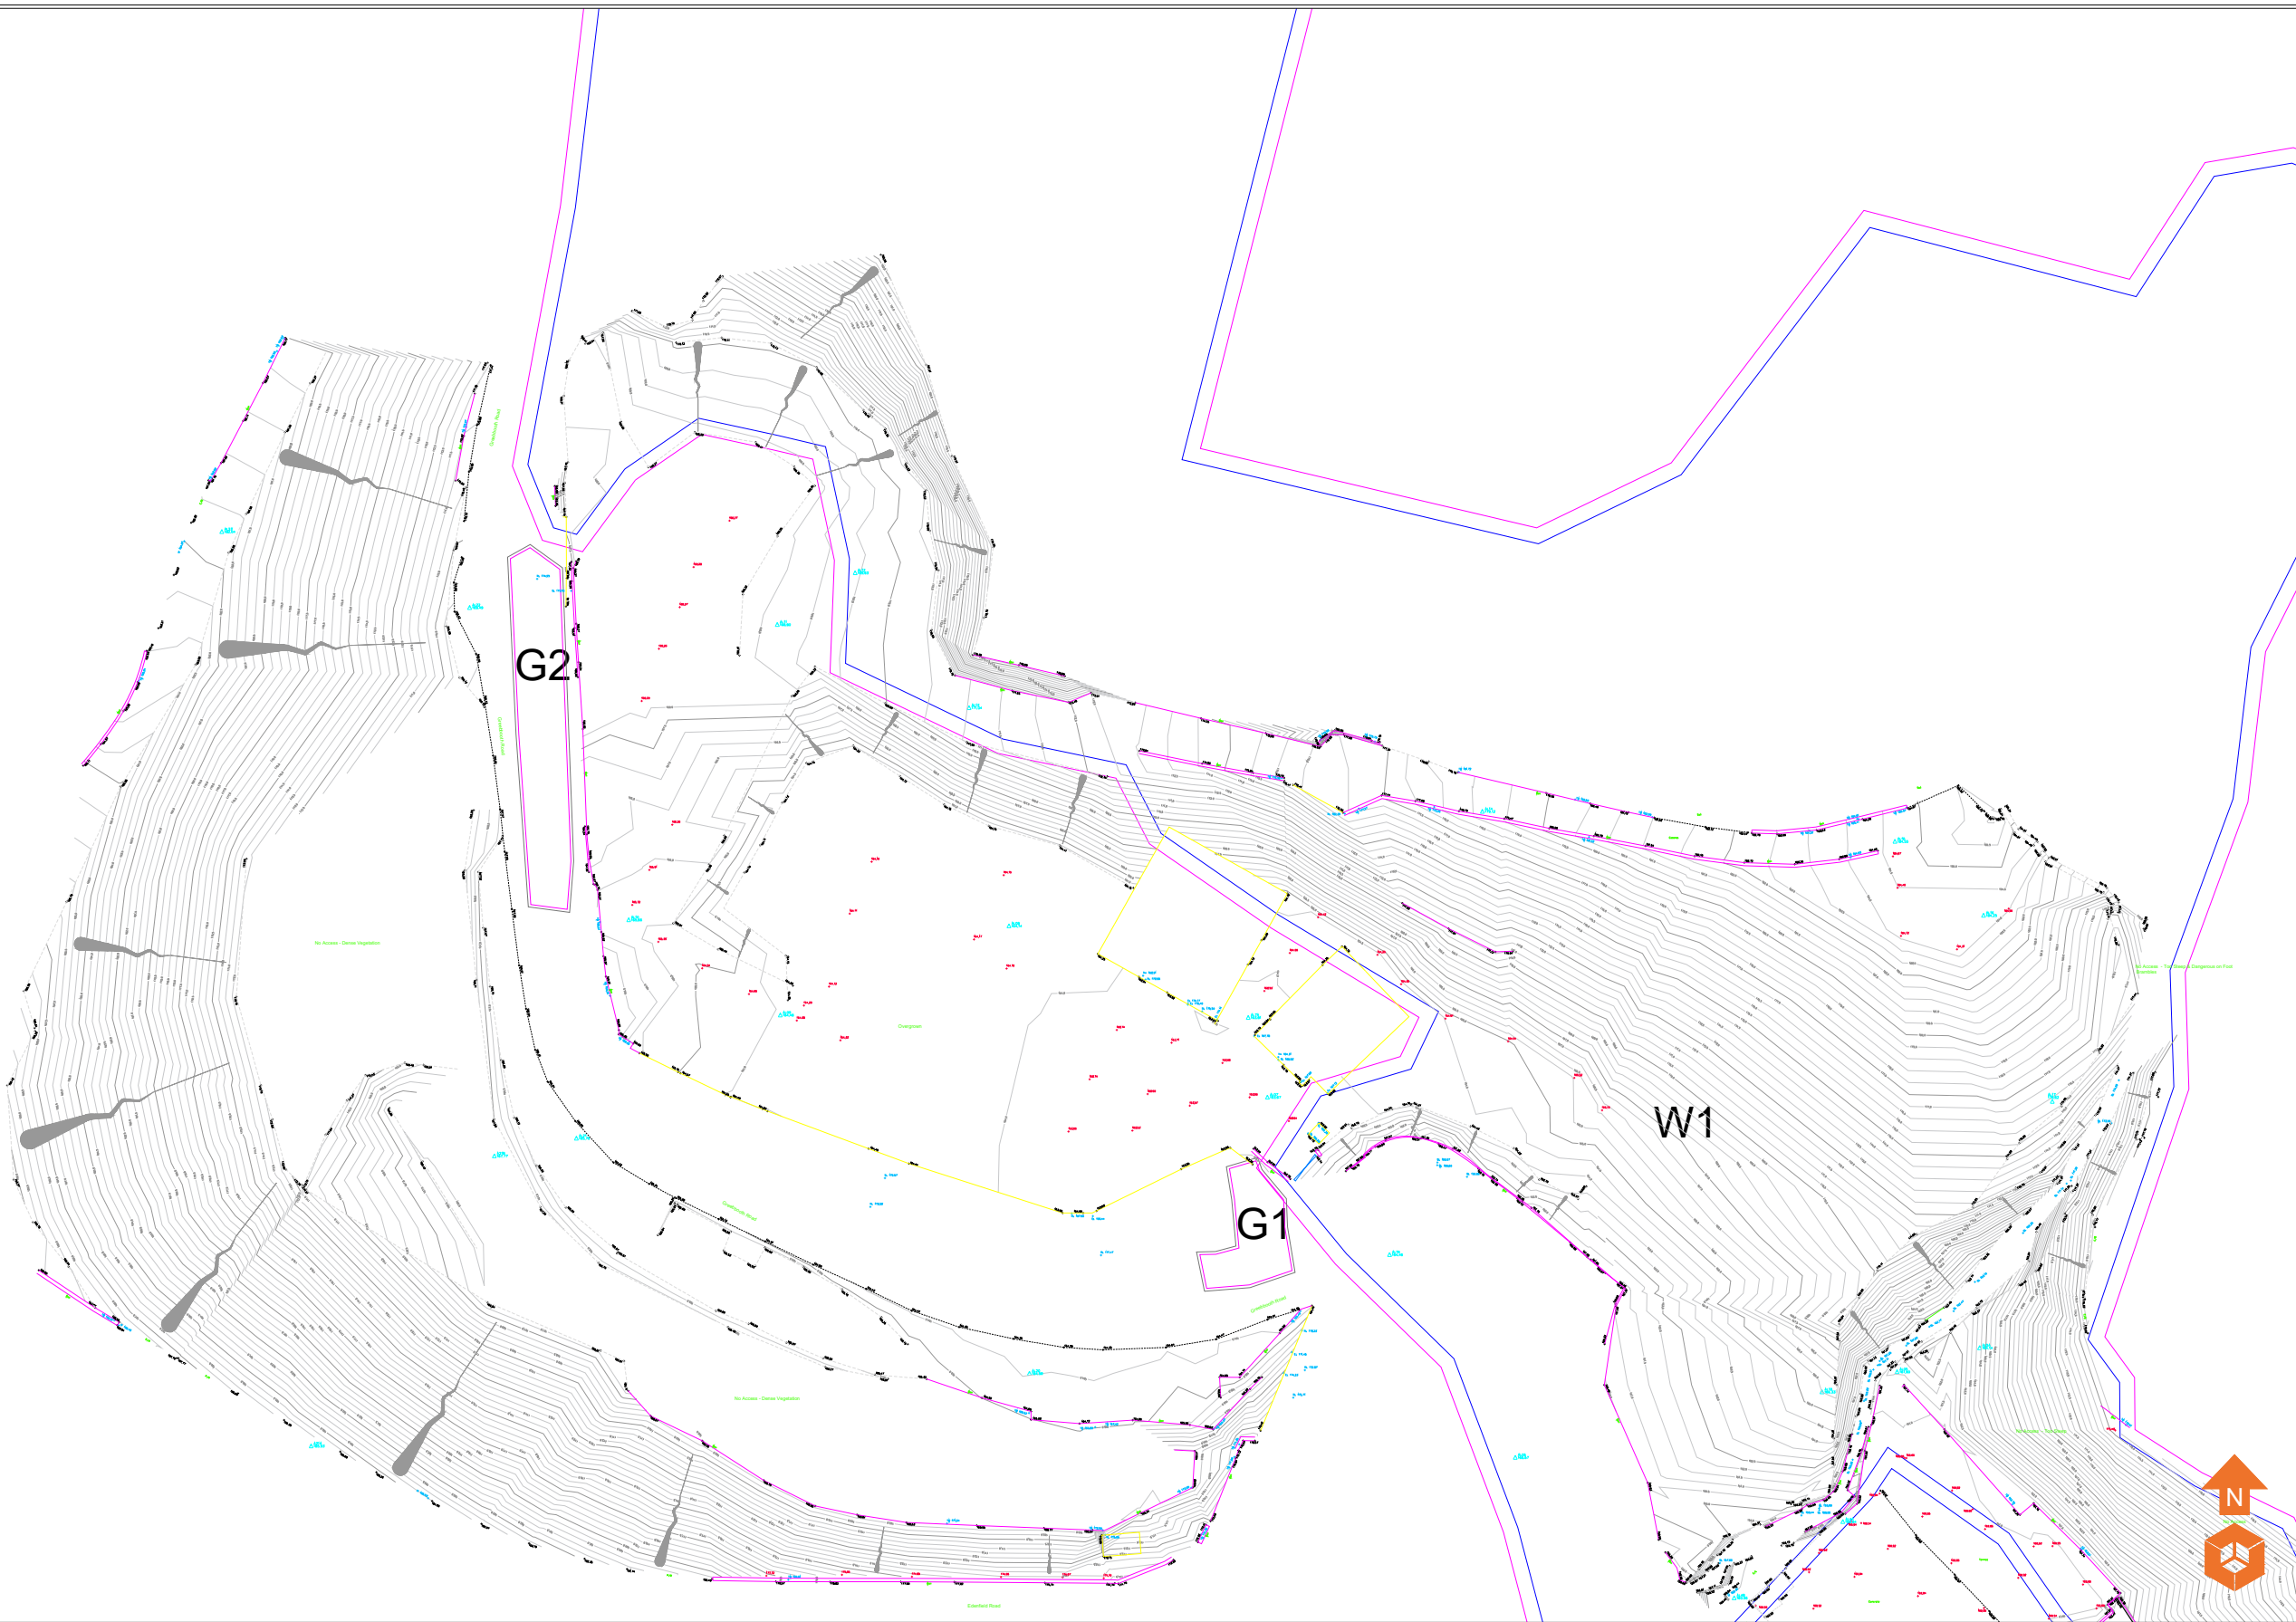

Tree Categorisations:

Those to be Considered for Retention:

Category 'A' Tree/Group/Hedge
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years

Category 'B' Tree/Group/Hedge
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years

Category 'C' Tree/Group/Hedge
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees

Category 'U' Tree/Group/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Root Protection Areas (RPAs):

RPAs
Area(s) of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Appended Temporary Protective Fencing Specification

Notes:

The stem location of trees were not included on the topographical survey based site plan provided, and their locations were subsequently plotted by the arboricultural surveyor using GPS siting and estimation at the time of the survey. As such, the plotted locations of these trees cannot therefore be considered to be wholly accurate.

Client:

Stonebond Group Ltd

Job No:

80-742

Date:

03.05.2023

Drawing No:

001

Scale:

1:1000 @ A3



Environmental Engineering Partnership Ltd
Taylor Road, Trafford Park
Urmston, Manchester, M41 7JQ
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

P1	REVA	03.05.2023	MD	MD
Phase	Issue	Date	Drawn	Checked

Job Title:


Greenbooth Road, Norden

Drawing Title:

Tree Constraints Plan
Sheet 2 of 2

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

APPENDIX IV TREE IMPACTS & PROTECTION PLAN

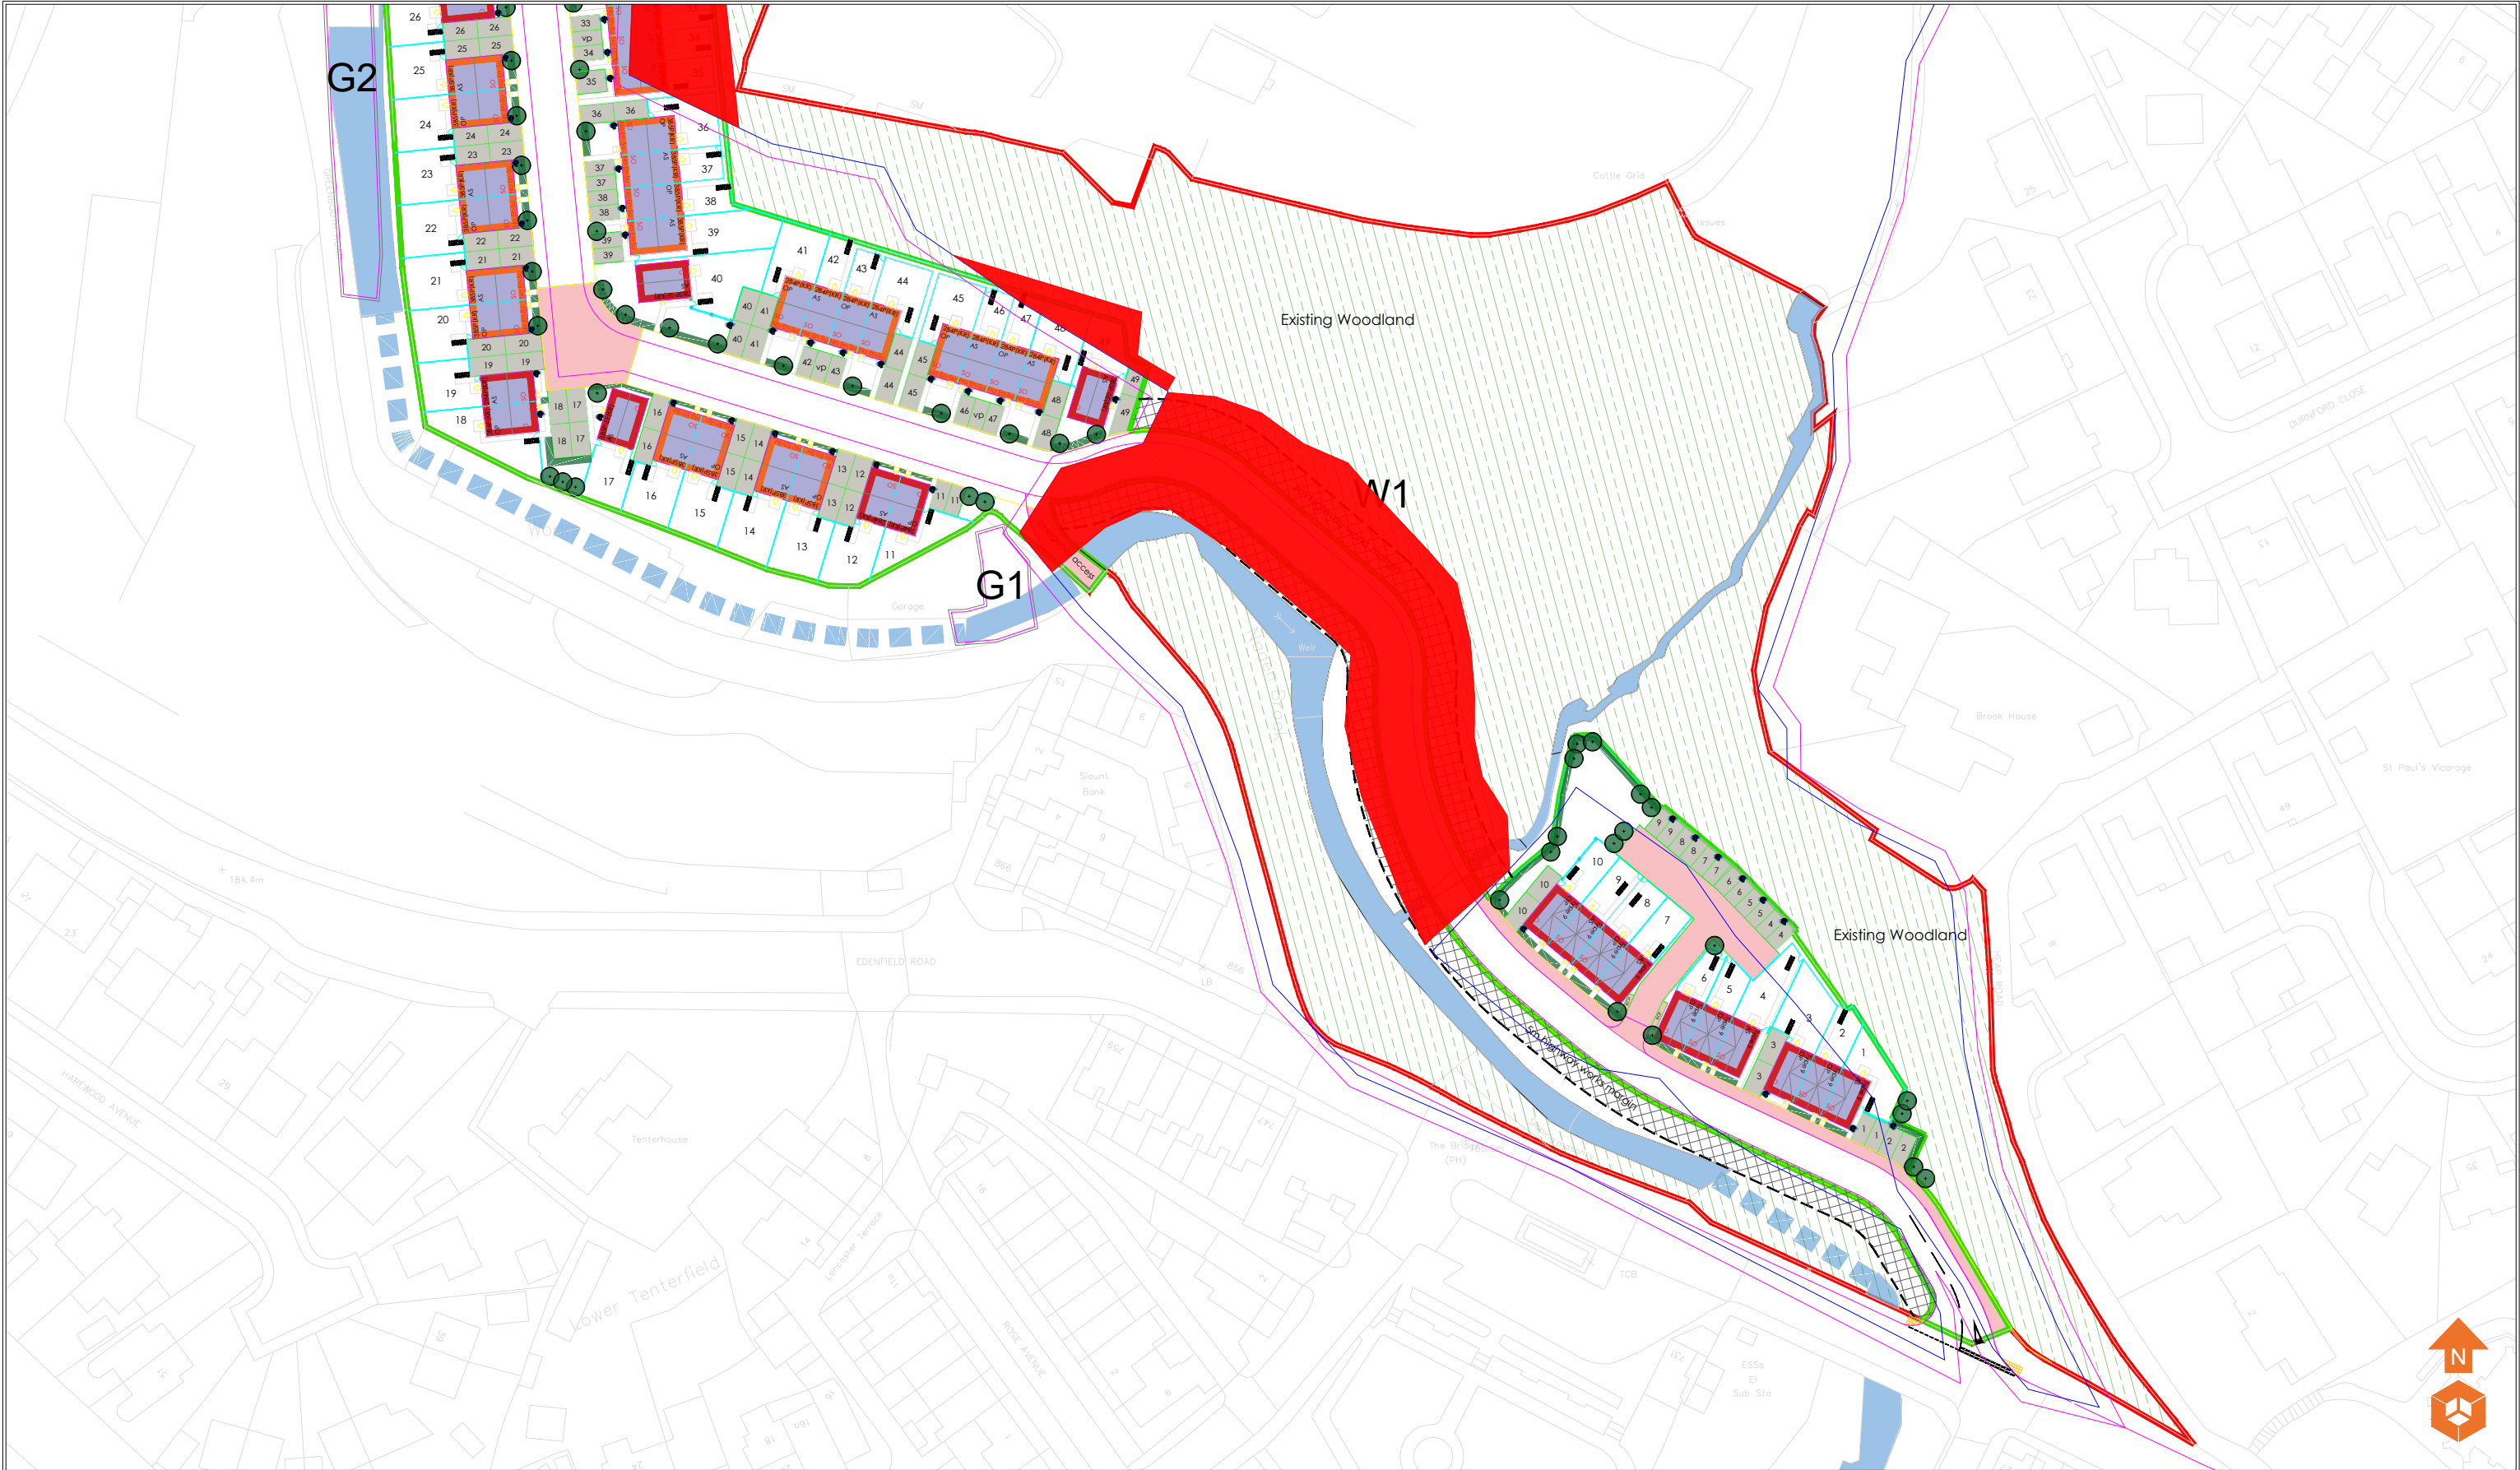

Tree Categorisations:
Those to be Considered for Retention:

Category 'A' Tree/Group/Hedge
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years

Category 'B' Tree/Group/Hedge
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years

Category 'C' Tree/Group/Hedge
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees

Those Unsuitable for Retention:

Category 'U' Tree/Group/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Root Protection Areas (RPAs):

RPAs
Area(s) of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Appended Temporary Protective Fencing Specification

Tree Removals:
Tree removals
Proposed tree removals in the context of the development proposals

Root Protection Area Encroachment:

Tree Protective Fencing:

Notes:

The stem location of trees were not included on the topographical survey based site plan provided, and their locations were subsequently plotted by the arboricultural surveyor using GPS siting and estimation at the time of the survey. As such, the plotted locations of these trees cannot therefore be considered to be wholly accurate.

Client:

Stonebond Group Ltd

Job No: 80-742

Date: 21.06.2023

Drawing No: 001

Scale: 1:1000 @ A3

Environmental Engineering Partnership Ltd
Taylor Road, Trafford Park
Urmston, Manchester, M41 7JQ
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

Job Title:


Greenbooth Road, Norden

Drawing Title:

Tree Impacts & Protection Plan
Sheet 1 of 2

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

P1	REVA	21.06.2023	MD	MD
Phase	Issue	Date	Drawn	Checked

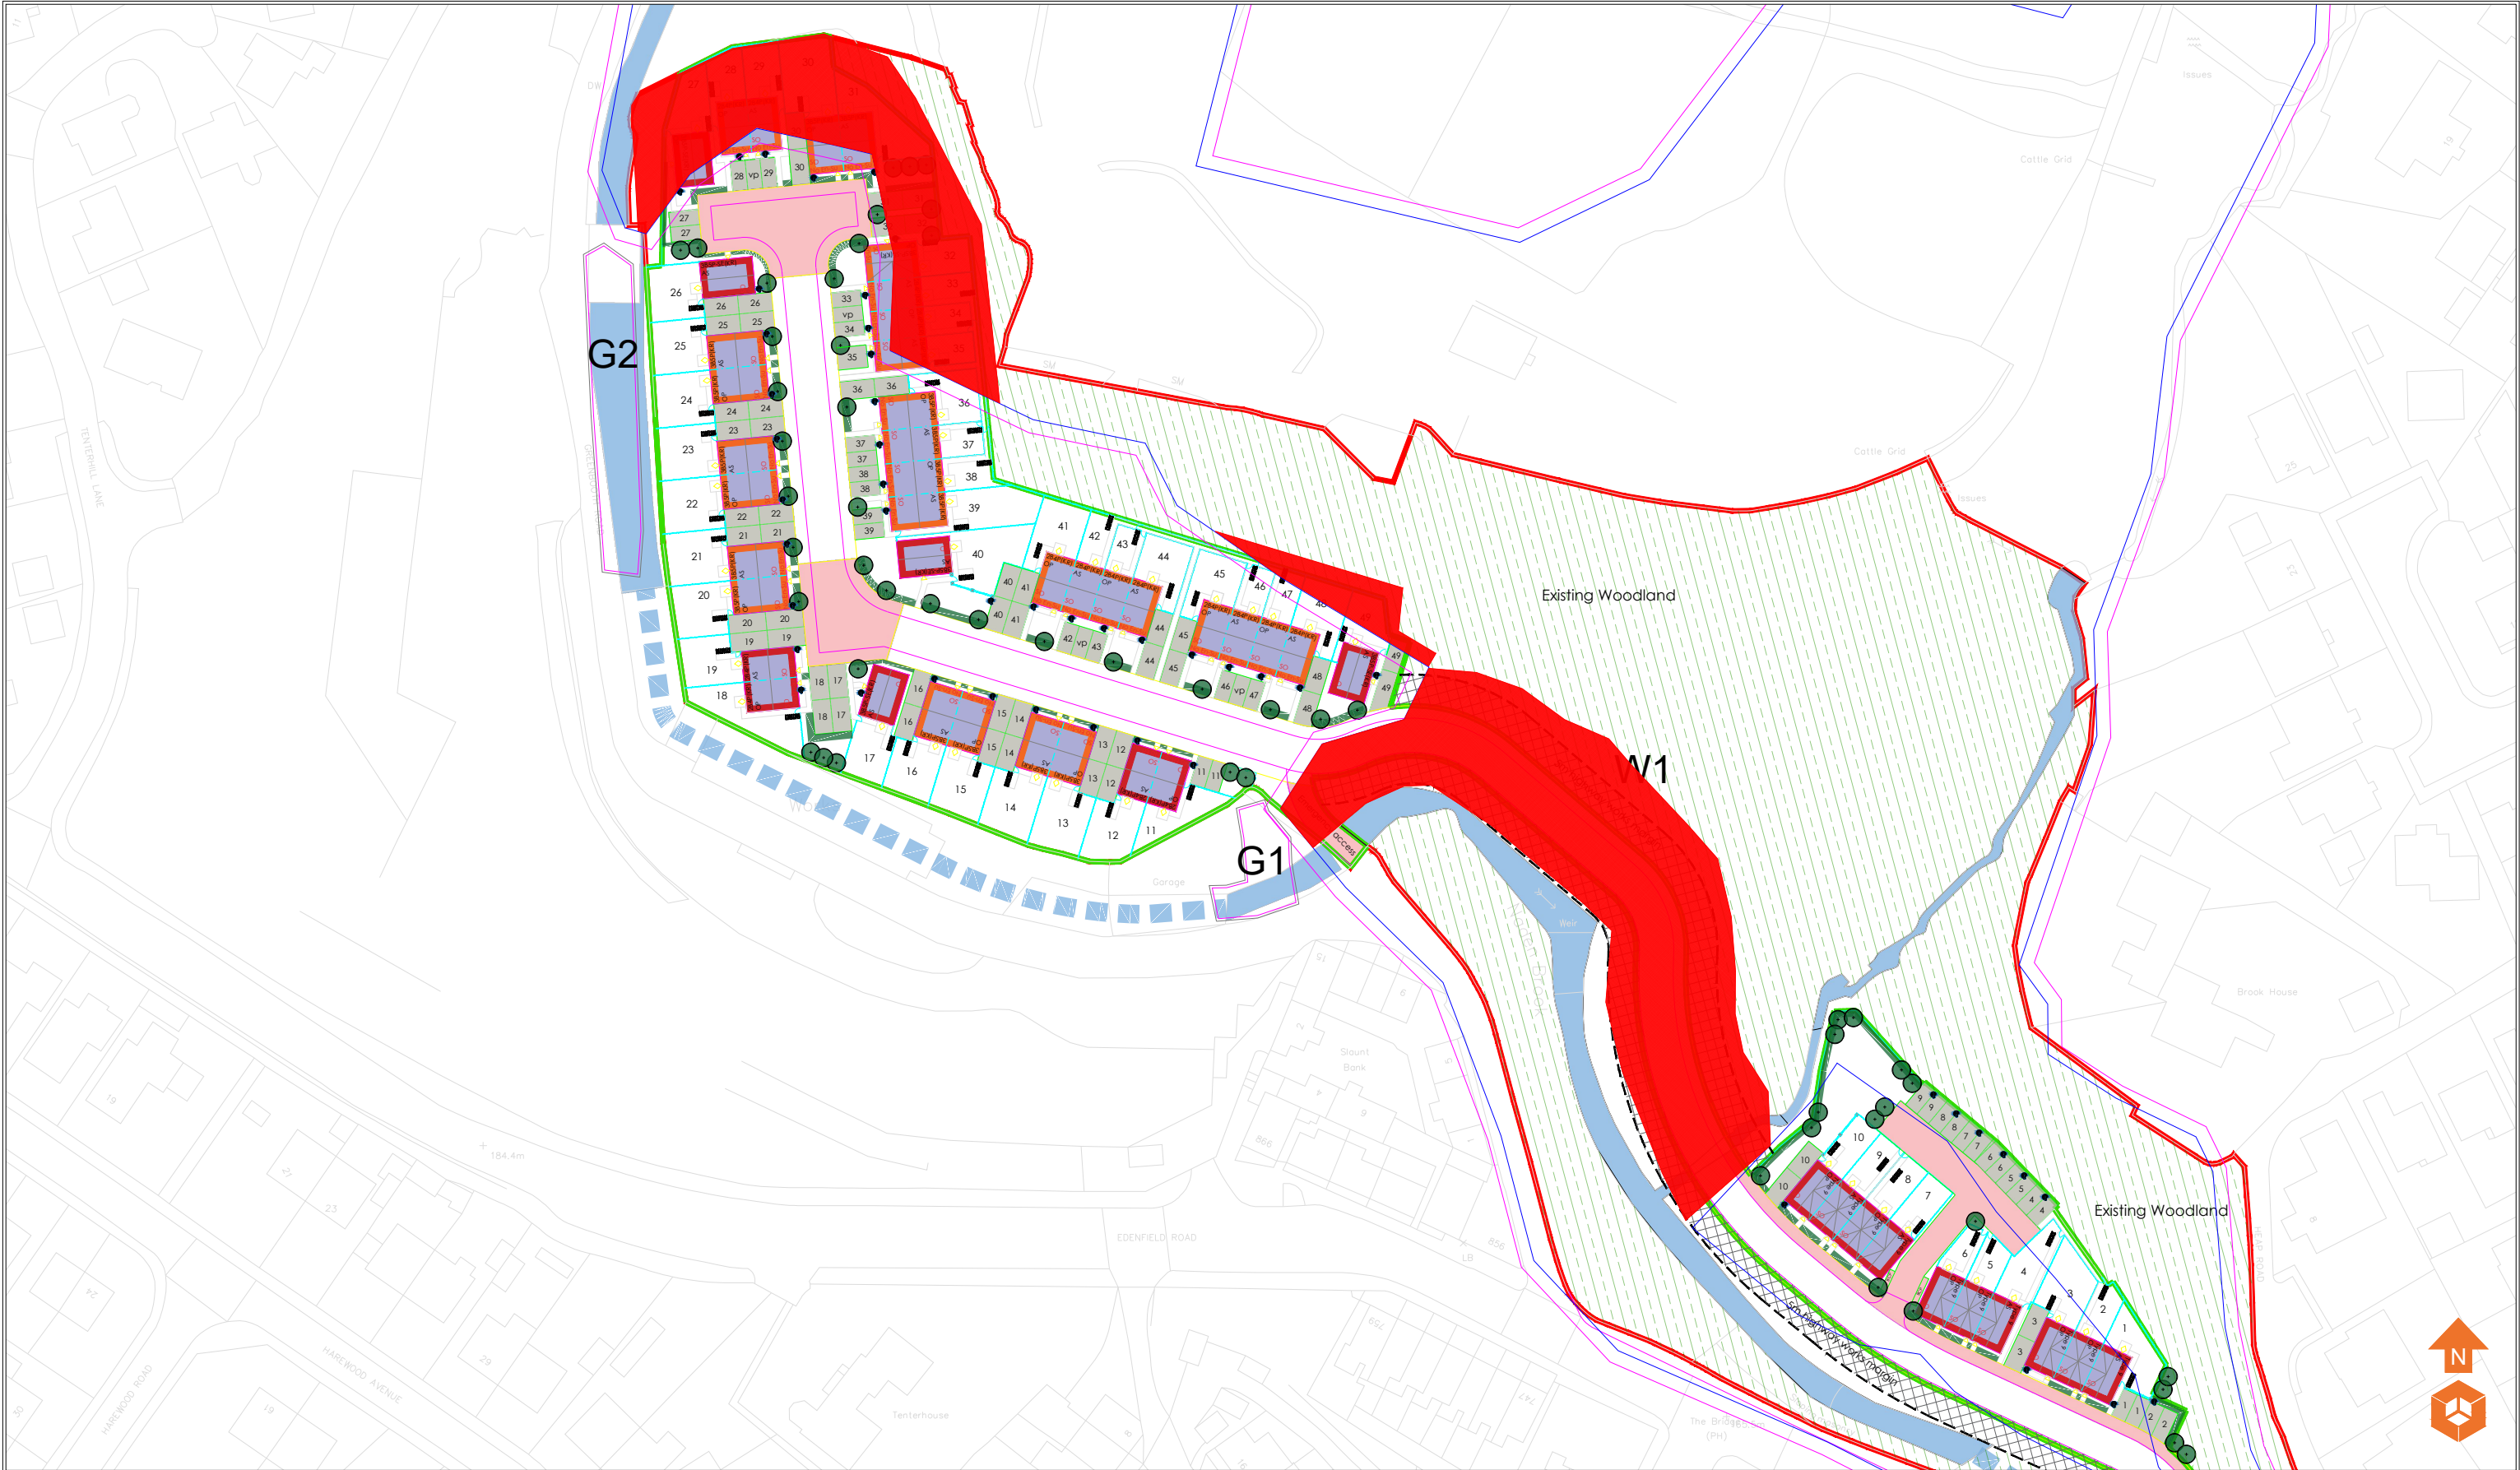

Tree Categorisations:

Those to be Considered for Retention:

-  **Category 'A' Tree/Group/Hedge**
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years
-  **Category 'B' Tree/Group/Hedge**
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years

-  **Category 'C' Tree/Group/Hedge**
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees
-  **Those Unsuitable for Retention:**
Category 'U' Tree/Group/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Root Protection Areas (RPAs):

-  **RPAs**
Area(s) of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Appended Temporary Protective Fencing Specification

-  **Tree Removals:**
Tree removals
Proposed tree removals in the context of the development proposals

Root Protection Area Encroachment:



-  **Tree Protective Fencing:**

Notes:

The stem location of trees were not included on the topographical survey based site plan provided, and their locations were subsequently plotted by the arboricultural surveyor using GPS stiling and estimation at the time of the survey. As such, the plotted locations of these trees cannot therefore be considered to be wholly accurate.

P1	REVA	21.06.2023	MD	MD
Phase	Issue	Date	Drawn	Checked

Client:

Stonebond Group Ltd

Job Title:

Greenbooth Road, Norden

Job No:

80-742

Drawing No:

001

Date:

21.06.2023

Scale:

1:1000 @ A3

Drawing Title:

Tree Impacts & Protection Plan
Sheet 2 of 2



Environmental Engineering Partnership Ltd
Taylor Road, Trafford Park
Urmston, Manchester, M41 7JQ
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.