



Code Specification


ASD Lighting Clarity Portrait Plain, Black, Premium Opal, 4000K, LED 600, IP65. 125mm Depth, 276mm Height, 190mm Width, Body: Landscape/portrait orientation in vandal resistant polycarbonate self-extinguishing fire properties in black / white / titanium, Fascia Ring: Vandal resistant polycarbonate with self-extinguishing fire properties, Diffuser: Vandal resistant polycarbonate opal with self-extinguishing fire properties. Applications not limited to: Hospitality, Rail & Transport, Residential & Domestic, Social Housing. UKCA & CE, BS EN 60598, Class I.

Technical Information

Colour	Black
Diffuser	Premium Opal
CCT	4000 K
System Power	7.8 W
Delivered Lumens	517 lm
Efficacy	66.28 lm/W
Weight	1.2 KG

Dimensions

Depth	125mm
Height	276mm
Width	190mm

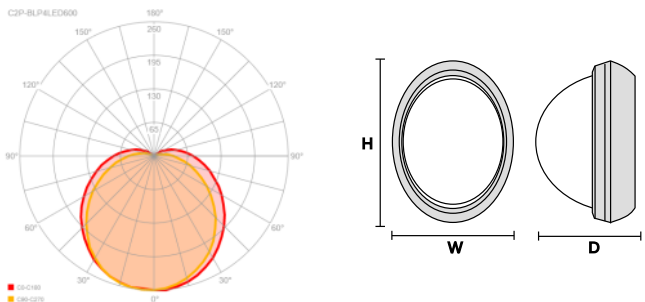

Range Information

The Clarity Portrait Plain is a robust high performance exterior luminaire from our Clarity Range.

Range Specification

- Ceiling & wall mounted portrait or landscape
- 5 Year LED guarantee
- Vandal resistant polycarbonate body and diffuser
- Louvre, Eyelid, Cage or Plain Ring trims
- Simple installation
- Fast fit base and gear tray
- Single screw fixing front trims
- Interchangeable trims
- Screw down diffuser
- 2 x Conduit entry points
- BESA fixing and rear cable entry
- Auto level Feature
- Hinged front fascia retained by single screw

Range Options

- HI-LO PIR (luminaire at 10% during periods of inactivity, 100% light output when HI-LO PIR detects movement)
- Fluorescent options available
- PIR / Photocell options available

