
Tree work schedule	Birch Hill Gardens estate Rochdale OL12 9RN	**Walkers Professional Arboricultural Services.** **Tree condition report.** Ref: 130 Date Issued: 31/05/2026
		Tree risk mitigation works schedule 2026

Tree works specification herein are to be completed and conform to - BS 3998:2010 Tree Work. Recommendations. And undertaken by professional arborist only

Tree Number	Works to undertake	Priority value	Date completed
T12 Sycamore	Remove deadwood over drive	Medium – 6 months	
T14 Sycamore	Remove deadwood from crown	Medium – 6 months	
T34 Sycamore	Fell and remove from site	High – 30 days	
T35 Cherry	Fell and remove from site	Medium – 6 months	
T81 & T82 Sycamore	Opposite number 16 & 18 Oakhurst Drive – Crown raise to 4 meters from ground level and reduce branches growing toward properties by 2 meters.	Medium – 6 months	

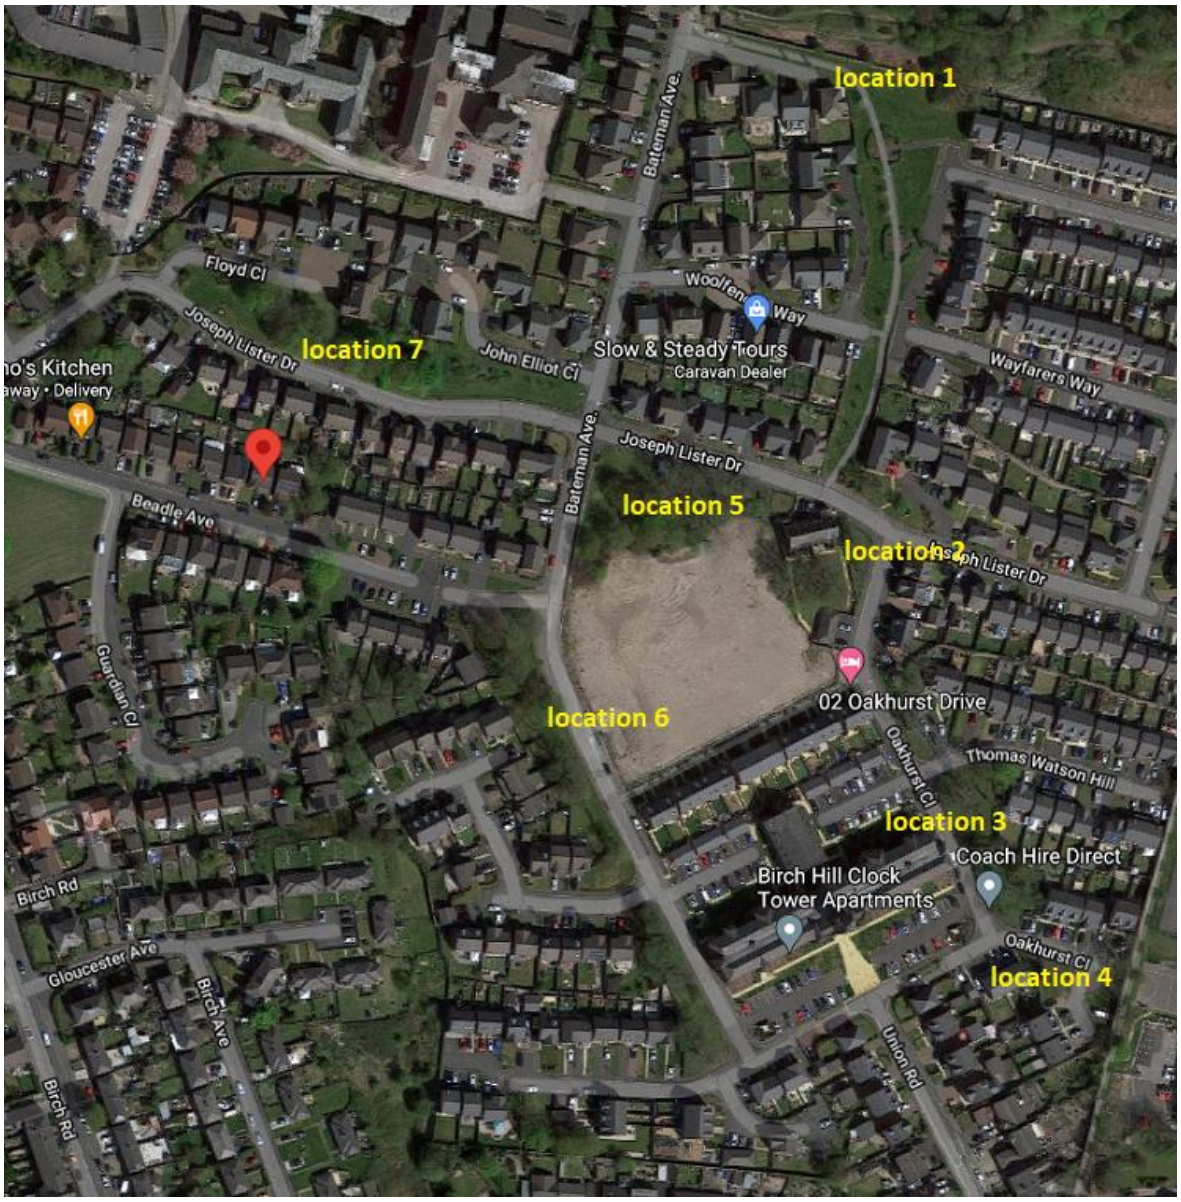


Tree Locations
Part 3
T12
T13
T14
T15
T16
T17
T18
T19
T20
T21
T22
T23
T24
T25
T26
T27
T28
T29
T30
T31
T32
T33
Google Earth
40 m
N


Tree Locations
Part 4
T34
T35
T37
T38
Google Earth
40 m
N


Tree Location
Part 6
T78
T81
T80
T79
T82
T83
T84
T12
T85
T86
T87
T88
T89
T90
T91
T76
T92
T93
T94
T95